

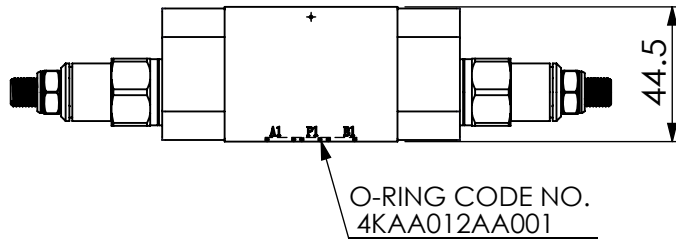


Ordering Code: **MH03FDT-X-Y-Z01**
 Stack Height : 44.5mm

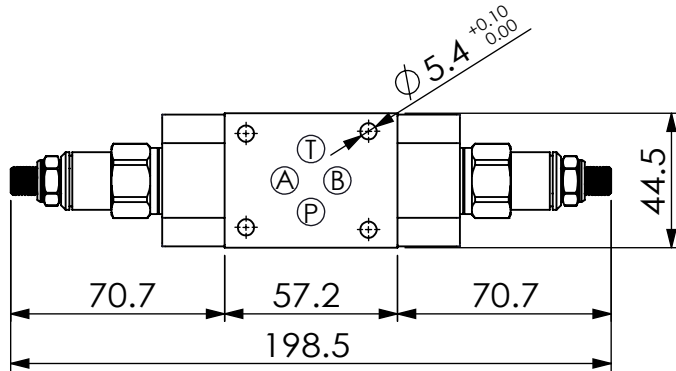

UNIT:mm

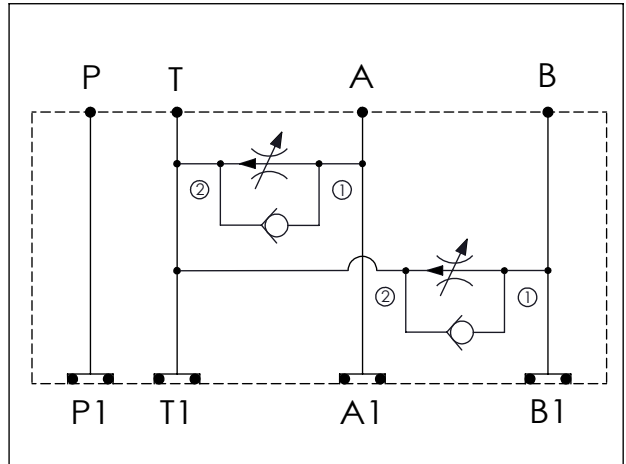


TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron
 Body Pressure Rating: 350 bar
 Rated flow: 23 l/min
 (Pressure Compensated)

Cartridge Valve:
 Refer to FR13A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.45 kg(WITHOUT VALVES)
	0.75 kg(INCLUDE VALVES)
Ductile Iron	1.2 kg(WITHOUT VALVES)
	1.5 kg(INCLUDE VALVES)

* If you need the special specification.
 Please contact us.

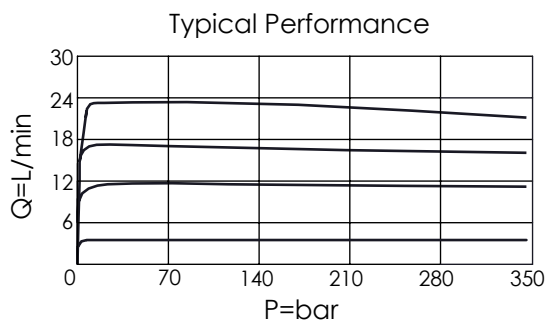

X SELECTION FOR A PORT CONTROL

13A2	CAVITY ONLY(WITHOUT VALVE)
FR0A	FR13A20AL(0.4-23LPM,350bar)
FR0C	FR13A20CL(0.4-4LPM,350bar)

Please refer to the list price of cartridge program.

Y SELECTION FOR B PORT CONTROL

13A2	CAVITY ONLY(WITHOUT VALVE)
FR0A	FR13A20AL (0.4-23LPM,350bar)
FR0C	FR13A20CL(0.4-4LPM,350bar)

Please refer to the list price of cartridge program.

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON