



ISO 03 SANDWICH MANIFOLD




Stack Height: 44.5mm





UNIT:mm





TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 1/min


Cartridge Valve:


Refer to FR10W-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.31 kg(WITHOUT VALVE) 0.45 kg(INCLUDE VALVE)

^{*} If you need the special specification. Please contact us.

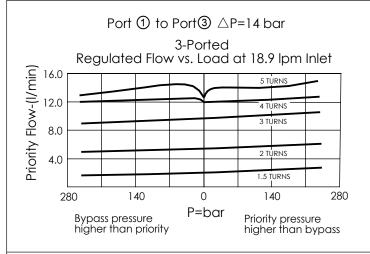

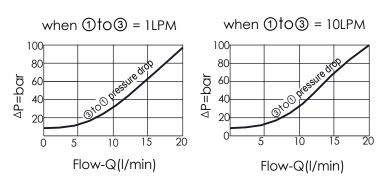

X	SELECTION FOR P PORT CONTROL	
10W3	CAVITY ONLY (WITHOUT VALVE)	
FR1L	FR10W31NL (13LPM,240bar)	
FR3L	FR3L FR10W33NL (38LPM,240bar)	
Please refer to the list price of cartridge program.		

Y	SELECTION FOR G PORT	
N	WITHOUT PORT	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	

Rev.220223 M.FPB.301