


Ordering Code: **MH03FPT-X-Y-Z01**

Stack Height : 44.5mm

UNIT:mm

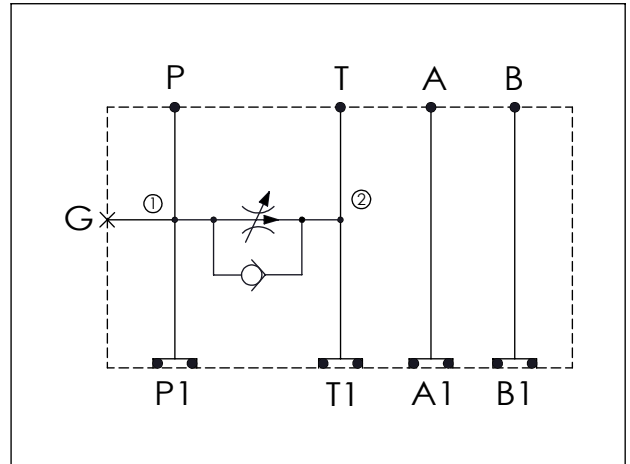

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 23 l/min (Pressure Compensated)

Cartridge Valve:
 Refer to FR13A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.28 kg(WITHOUT VALVE) 0.42 kg(INCLUDE VALVE)
Ductile Iron	0.76 kg(WITHOUT VALVE) 0.9 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

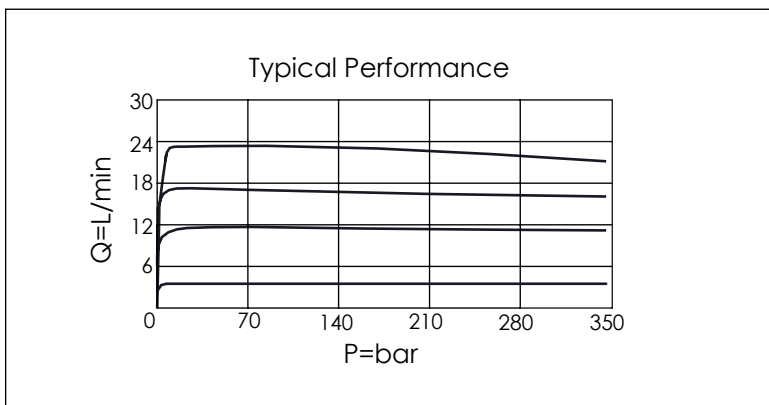

X	SELECTION FOR G PORT	
G02	G 1/4"(Metric)	
N02	NPT 1/4"(U.S. Units)	

Y	SELECTION FOR B PORT CONTROL
13A2	CAVITY ONLY(WITHOUT VALVE)
FR0A	FR13A20AL (23LPM,350bar)

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	

Please refer to the list price of cartridge program.