



## ISO 03 SANDWICH MANIFOLD

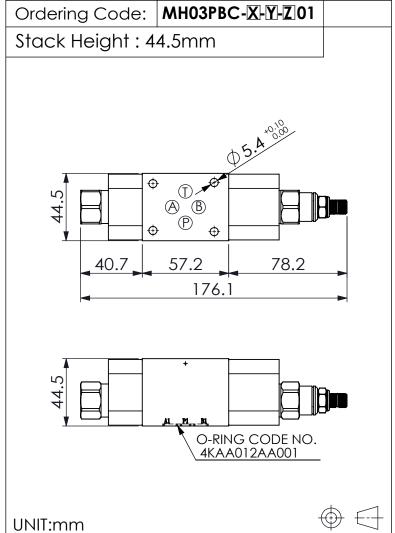

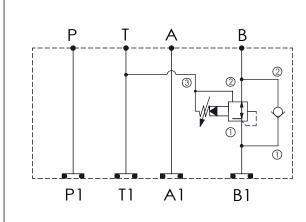

## TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 I/min

Cartridge Valve:

Refer to CV13A-X-Y-Z

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.46 kg(WITHOUT VALVES) 0.71 kg(INCLUDE VALVES)
Ductile Iron	1.33 kg(WITHOUT VALVES) 1.58 kg(INCLUDE VALVES)

\* If you need the special specification. Please contact us.

140r	Regulated Pressure (PP11A30AL) Relieving Reducing	
120		
Pressure-AP (bar)		
40s €		
SSSUre		
<u>⊕</u> 40• 20•		
	40 -20 0 20 40 60	
-4	10 -20 0 20 40 60 Flow-Q(I/min)	

X	SELECTION FOR CHECK VALVE	
13A2	CAVITY ONLY (WITHOUT VALVE)	
CP00	CP00 CP13A2H00N (PLUG ONLY)	
CV2020	CV13A2020N (80LPM , 2.0bar)	
Please refer to the list price of cartridge program.		

Y	SELECTION FOR B PORT CONTROL	
11A3	CAVITY ONLY (WITHOUT VALVE)	
PPOA	PP11A30AL (40LPM , 7-210bar)	
Please	refer to the list price of cartridge program.	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	

Rev.220118 M.PBC.302