



## ISO 03 SANDWICH MANIFOLD

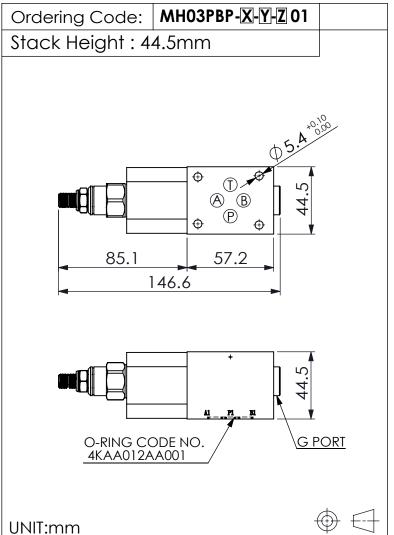



## TECHNICAL DATA Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar


Rated flow: 40 I/min

## Cartridge Valve: Refer to PB11A-X-Y-Z

\* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.45 0.6	kg(WITHOUT VALVE) kg(INCLUDE VALVE)
Ductile Iron	1.2 1.35	kg(WITHOUT VALVE) kg(INCLUDE VALVE)

\* If you need the special specification. Please contact us.



x	SELECTION FOR A PORT CONTROL
11A3	CAVITY ONLY (WITHOUT VALVE)
PB0A	PB11A30AL (40LPM ,7-210bar)
Please	refer to the list price of cartridge program.

Y	SELECTION FOR G PORT		
G02	G 1/4"(Metric)		
N02	NPT 1/4"(U.S. Units)		

Z	BODY MATERIAL			
Α	HIGH-STRENGTH ALUMINUM			
S	DUCTILE IRON			

Rev.220420 M.PBP.301