


Ordering Code: **MH03PPW-X-Y-Z 01**

Stack Height : 44.5mm

O-RING CODE NO. 4KAA012AA001

G PORT

UNIT:mm

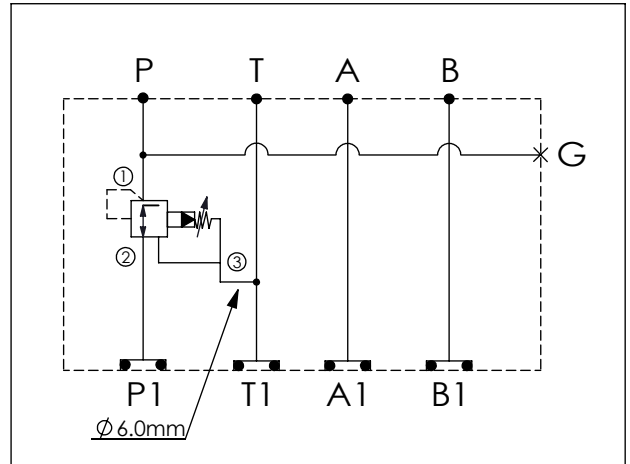

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
 Ductile Iron
 Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
 Refer to PP11A-X-Y-Z
 * Refer to Winner Cartridge Valve Catalog.

Aluminum	0.32 kg(WITHOUT VALVE) 0.47 kg(INCLUDE VALVE)
Ductile Iron	0.9 kg(WITHOUT VALVE) 1.05 kg(INCLUDE VALVE)

* If you need the special specification.
 Please contact us.

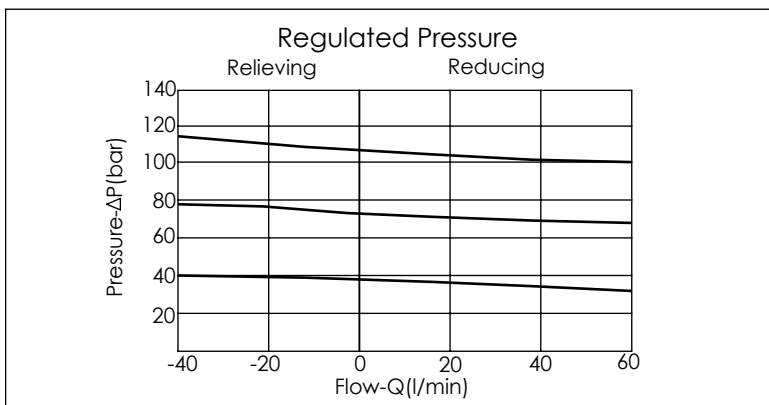

X	SELECTION FOR P PORT CONTROL
11A3	CAVITY ONLY(WITHOUT VALVE)
PPOA	PP11A30AL(40LPM,7.0~210bar) (Pilot Operated Reducing/Relieving)
PPOB	PP11A30BL(40LPM,3.5~105bar) (Pilot Operated Reducing/Relieving)

Please refer to the list price of cartridge program.

Y	SELECTION FOR G PORT
G02	G 1/4"(Metric)
N02	NPT 1/4"(U.S. Units)
S04	SAE 4

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON