


Ordering Code: **MH03PPW-X-Y-Z 02**

Stack Height : 40.0mm

O-RING CODE NO. 4KAA012AA001

G PORT

UNIT:mm

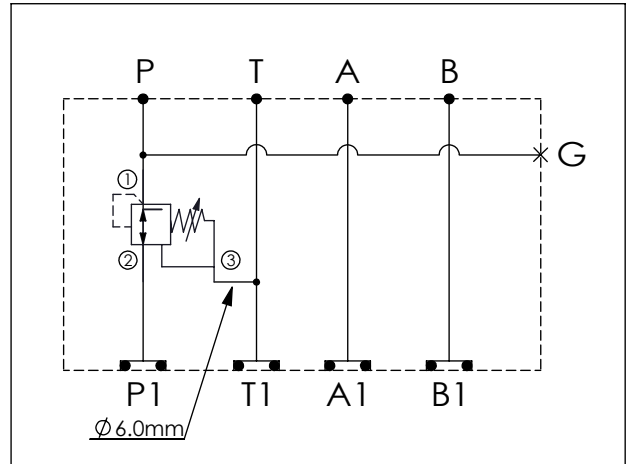

### TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron  
 Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:  
 Refer to PD11A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.34 kg(WITHOUT VALVE) 0.52 kg(INCLUDE VALVE)
Ductile Iron	1.0 kg(WITHOUT VALVE) 1.18 kg(INCLUDE VALVE)

\* If you need the special specification.  
 Please contact us.

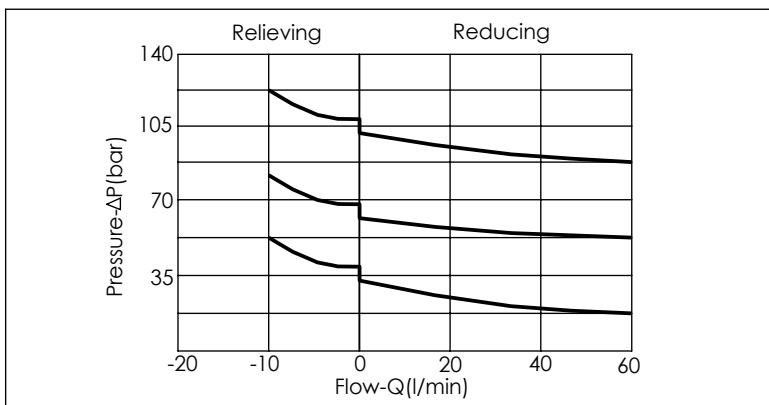

Y	SELECTION FOR G PORT
<b>G02</b>	G 1/4"(Metric)
<b>N02</b>	NPT 1/4"(U.S. Units)

X	SELECTION FOR P PORT CONTROL
<b>11A3</b>	CAVITY ONLY(WITHOUT VALVE)
<b>PDOA</b>	PD11A30AL(40LPM,35-210bar) (Direct Acting)
<b>PDOB</b>	PD11A30BL(40LPM,3.5-105bar) (Direct Acting)
<b>PDOD</b>	PD11A30DL(40LPM,1.7-55bar) (Direct Acting)
<b>PDOE</b>	PD11A30EL(40LPM,1.7-28bar) (Direct Acting)

Please refer to the list price of cartridge program.

Z	BODY MATERIAL
<b>A</b>	HIGH-STRENGTH ALUMINUM
<b>S</b>	DUCTILE IRON