

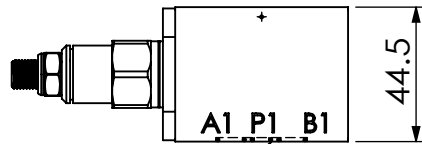


Ordering Code: **MH03SBA-X-Y-Z01**  
 Stack Height : 44.5mm

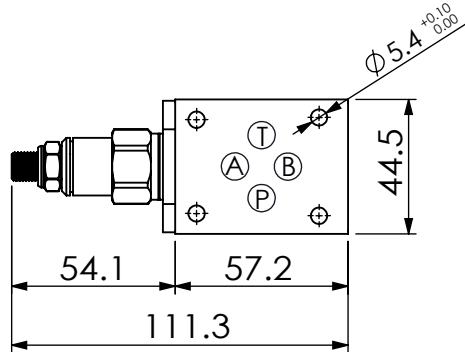

O-RING CODE NO.  
4KAA012AA001

UNIT:mm

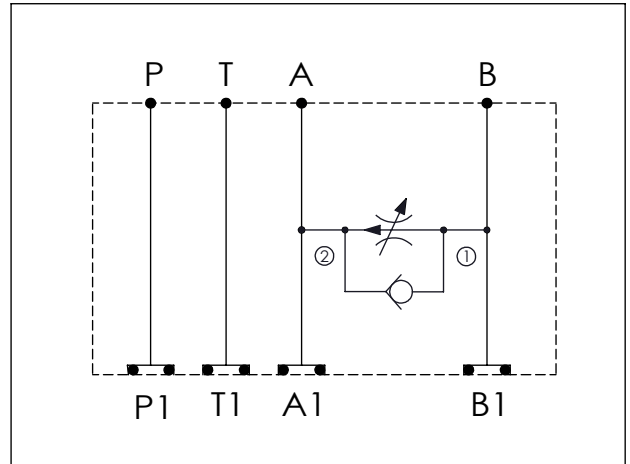

### TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 23 l/min  
 (Pressure Compensated)


Cartridge Valve:  
 Refer to FR13A-X-Y-Z

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.27 kg(WITHOUT VALVE)
	0.41 kg(INCLUDE VALVE)

\* If you need the special specification.  
 Please contact us.

Typical Performance

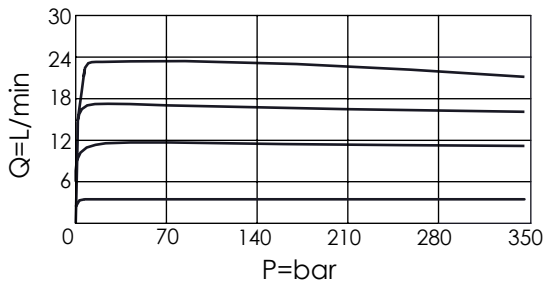

### X SELECTION FOR A PORT CONTROL

<b>13A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>FR0A</b>	FR13A20AL (23LPM,350bar)

Please refer to the list price of cartridge program.

### Y SELECTION FOR B PORT CONTROL

**N** WITHOUT PORT

### Z BODY MATERIAL

**A** HIGH-STRENGTH ALUMINUM