

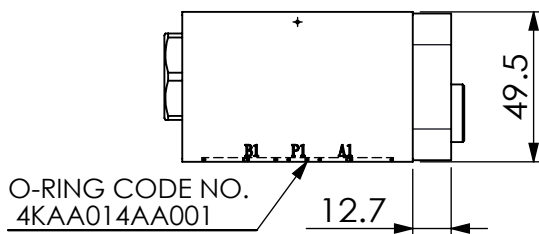


Ordering Code: **MH05CAW-X-Y-Z 01**

Stack Height : 49.5mm

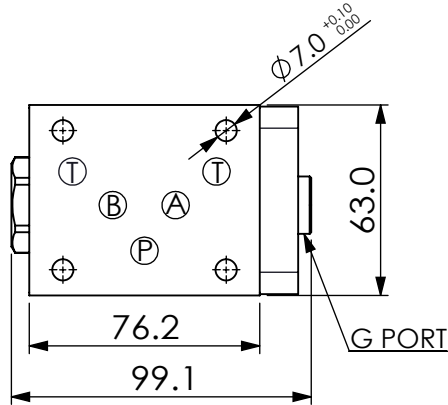

UNIT:mm

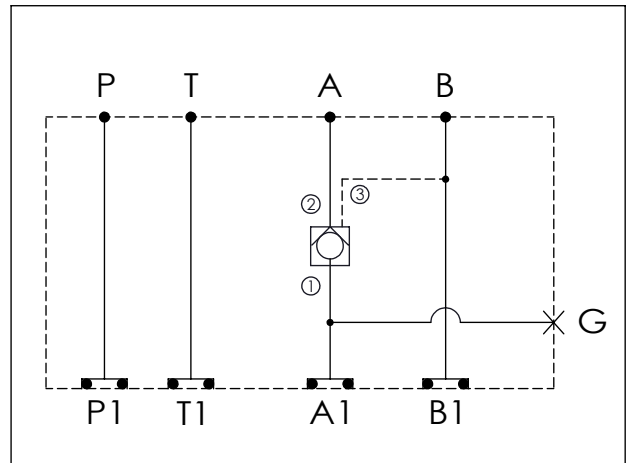

### TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron  
 Body Pressure Rating: 350 bar

Rated flow: 80 l/min

Cartridge Valve:  
 Refer to CO2A-X-Y-Z  
 \* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.65 kg(WITHOUT VALVE) 0.9 kg(INCLUDE VALVE)
Ductile Iron	1.65 kg(WITHOUT VALVE) 1.9 kg(INCLUDE VALVE)

\* If you need the special specification.  
 Please contact us.

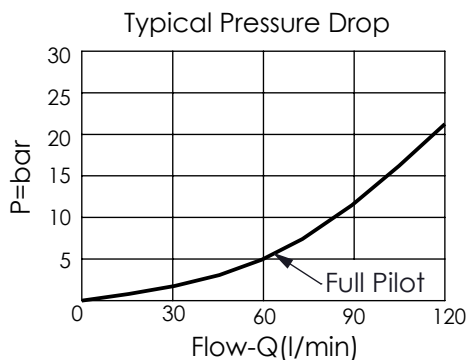

### X SELECTION FOR G PORT

<b>G02</b>	G 1/4"(Metric)	
<b>N02</b>	NPT 1/4"(U.S. Units)	

### Y SELECTION FOR B PORT CONTROL

<b>2A3</b>	CAVITY ONLY(WITHOUT VALVE)
<b>CO20</b>	CO2A3020N (120LPM,2.0bar)
<b>CO03</b>	CO2A3003N (120LPM,0.3bar)
<b>FAST ACTING</b>	
<b>CO20N2</b>	CO2A3020N-2 (120LPM,2.0bar)
<b>CO03N2</b>	CO2A3003N-2 (120LPM,0.3bar)

Please refer to the list price of cartridge program.

### Z BODY MATERIAL

<b>A</b>	HIGH-STRENGTH ALUMINUM	
<b>S</b>	DUCTILE IRON(Phosphatizing)	
<b>E</b>	DUCTILE IRON(Zinc-Nickel plating)	