


Ordering Code: **MH05CDW-X-Y-Z 21**

Stack Height : 49.5mm

Technical drawing showing dimensions and port locations:

- Overall length: 218.6 mm
- Port spacing: 71.2 mm (left), 76.2 mm (middle), 71.2 mm (right)
- Height: 63.0 mm
- Stack Height: 49.5 mm
- Port diameters:  $\phi 7.0^{+0.10}_{0.00}$
- O-RING CODE NO. 4KAA014AA001

UNIT:mm

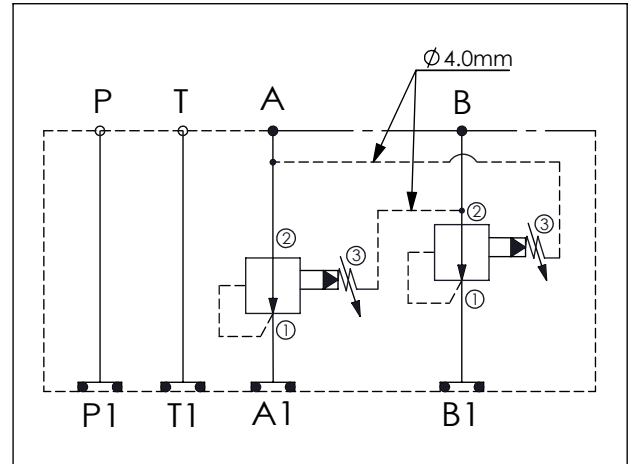

### TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:  
 Refer to PB11A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.95 kg(WITHOUT VALVES) 1.3 kg(INCLUDE VALVES)
Ductile Iron	2.62 kg(WITHOUT VALVES) 2.97 kg(INCLUDE VALVES)

\* If you need the special specification. Please contact us.

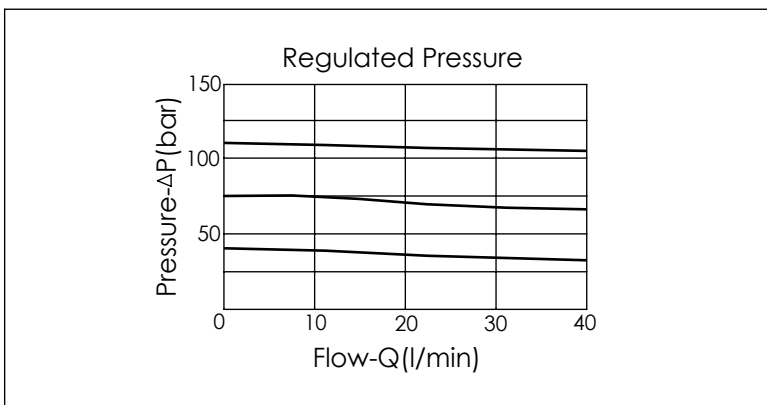

X	SELECTION FOR A PORT CONTROL
11A3	CAVITY ONLY(WITHOUT VALVE)
PB0A	PB11A30AL (40LPM ,7-210bar)

Please refer to the list price of cartridge program.

Y	SELECTION FOR B PORT CONTROL
11A3	CAVITY ONLY(WITHOUT VALVE)
PB0A	PB11A30AL (40LPM ,7-210bar)

Please refer to the list price of cartridge program.

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON(Phosphatizing)
E	DUCTILE IRON(Zinc-Nickel plating)