


TECHNICAL DATA	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	70 l/min
Cartridge Valve:	Refer to LP2A-X-Y-Z PFC17E-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.95 kg(WITHOUT VALVES) 1.6 kg(INCLUDE VALVES ,WITHOUT COIL)
DUCTILE IRON	2.77 kg(WITHOUT VALVES) 3.42 kg(INCLUDE VALVES ,WITHOUT COIL)
* If you need the special specification. Please contact us.	

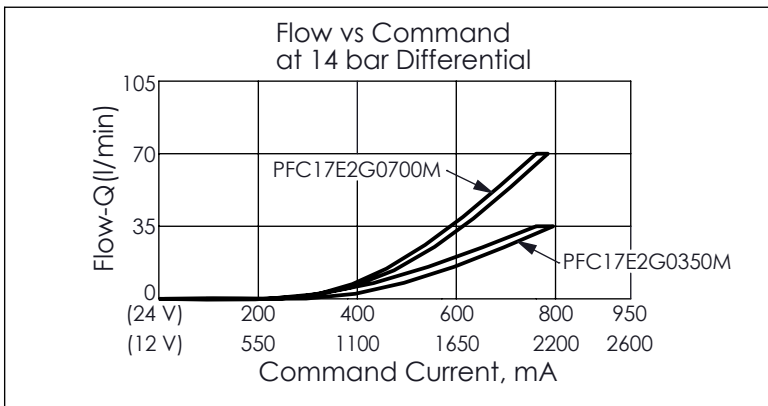

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC17E-X-Y-Z)
17E2	CAVITY ONLY(WITHOUT VALVE)
PFC35	PFC17E2G0350M(35LPM)
PFC70	PFC17E2G0700M(70LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-23C-X-Y-Z)	

X	SELECTION FOR COMPENSATOR
2A3	CAVITY ONLY(WITHOUT VALVE)
LP140	LP2A30140N(120LPM,14.0bar)
Please refer to the list price of cartridge program.	

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON