


TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar
 Rated flow: 40 l/min

Cartridge Valve:
 Refer to LP11A-X-Y-Z
 PFC13A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.95 kg(WITHOUT VALVES) 1.5 kg(INCLUDE VALVES, WITHOUT COIL)
DUCTILE IRON	2.77 kg(WITHOUT VALVES) 3.32 kg(INCLUDE VALVES, WITHOUT COIL)

* If you need the special specification. Please contact us.

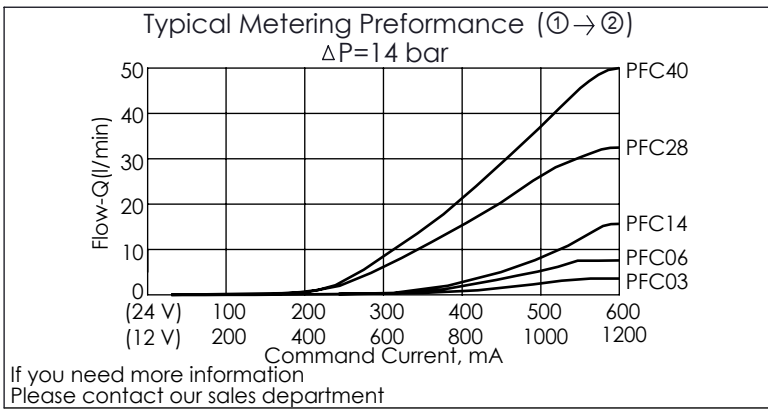

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC13A-X-Y-Z)
13A2	CAVITY ONLY(WITHOUT VALVE)
PFC03	PFC13A2D0030N(0.3~3LPM)
PFC06	PFC13A2D0060N(0.4~6LPM)
PFC14	PFC13A2D0140N(0.6~14LPM)
PFC28	PFC13A2D0280N(0.8~28LPM)
PFC40	PFC13A2D0400N(1.0~40LPM)

COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)

X	SELECTION FOR COMPENSATOR
11A3	CAVITY ONLY(WITHOUT VALVE)
LP140	LP11A30140N(60LPM,14.0bar)

Please refer to the list price of cartridge program.

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON