


TECHNICAL DATA	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min
Cartridge Valve:	Refer to CV13A-X-Y-Z PFC13A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.8 kg (WITHOUT VALVES) 1.45 kg (INCLUDE VALVES, WITHOUT COIL)

* If you need the special specification. Please contact us.

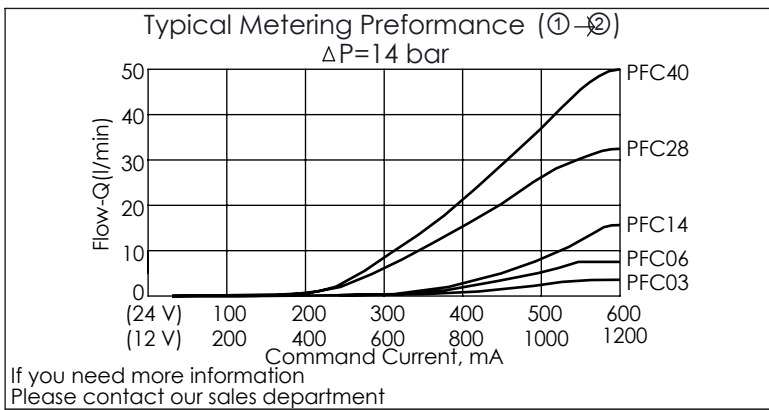

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC13A-X-Y-Z)
13A2	CAVITY ONLY (WITHOUT VALVE)
PFC03	PFC13A2D0030N (0.3~3LPM)
PFC06	PFC13A2D0060N (0.4~6LPM)
PFC14	PFC13A2D0140N (0.6~14LPM)
PFC28	PFC13A2D0280N (0.8~28LPM)
PFC40	PFC13A2D0400N (1.0~40LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)	

X	SELECTION FOR COMPENSATOR
13A2	CAVITY ONLY (WITHOUT VALVE)
CV2020	CV13A2020N (80LPM, 2.0bar)
Please refer to the list price of cartridge program.	

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM