



ISO 05 SANDWICH MANIFOLD

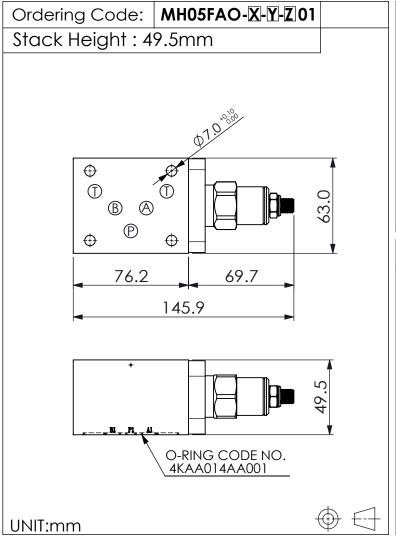



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 80 I/min


Cartridge Valve:

Refer to NV5A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.6 0.87	kg(WITHOUT VALVE) kg(INCLUDE VALVE)
Ductile Iron	1.76	kg(WITHOUT VALVE) kg(INCLUDE VALVE)

^{*} If you need the special specification. Please contact us.

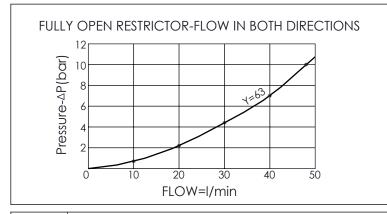

X	SELECTION FOR A PORT CONTROL	
5A2	CAVITY ONLY (WITHOUT VALVE)	
NV63	NV5A2063L (350bar)	
Please refer to the list price of cartridge program.		

Y	SELECTION FOR B PORT CONTROL
N	WITHOUT PORT

Z	BODY MATERIAL		
Α	HIGH-STRENGTH ALUMINUM		
S	DUCTILE IRON		

Rev.240502 M.FAO.502