


TECHNICAL DATA	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min
Cartridge Valve:	Refer to PFC13A-X-Y-Z CV13A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.8 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES, WITHOUT COIL)

* If you need the special specification. Please contact us.

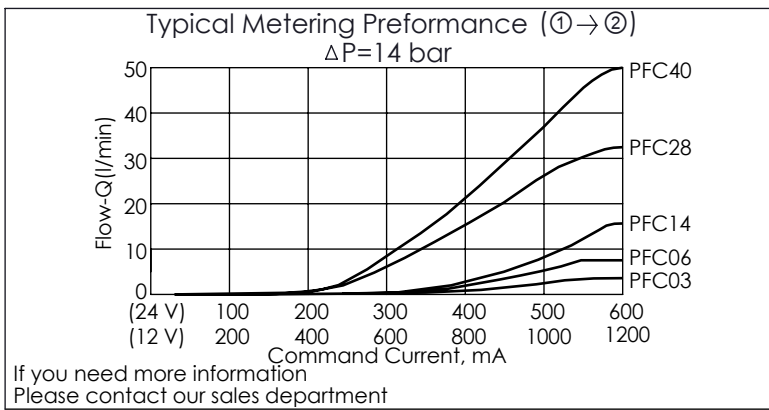

Y	SELECTION FOR CHECK VALVE
13A2	CAVITY ONLY(WITHOUT VALVE)
CV2020	CV13A2020N (80LPM,2.0bar)

X	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC13A-X-Y-Z)
13A2	CAVITY ONLY(WITHOUT VALVE)
PFC03	PFC13A2D0030N(0.3~3LPM)
PFC06	PFC13A2D0060N(0.4~6LPM)
PFC14	PFC13A2D0140N(0.6~14LPM)
PFC28	PFC13A2D0280N(0.8~28LPM)
PFC40	PFC13A2D0400N(1.0~40LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)	

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM

Please refer to the list price of cartridge program.