

ISO 05 SANDWICH MANIFOLD


Ordering Code: **MH05FDI-X-Y-Z01**

Stack Height : 49.5mm

Technical drawing showing dimensions and port labels:

- Overall length: 229.2
- Port spacing: 76.5 (P to T), 76.2 (T to A), 76.5 (A to B)
- Height: 63.0
- Port diameter: $\phi 7.0^{+0.10}_{0.00}$
- Stack Height: 49.5
- O-RING CODE NO. 4KAA014AA001

UNIT:mm

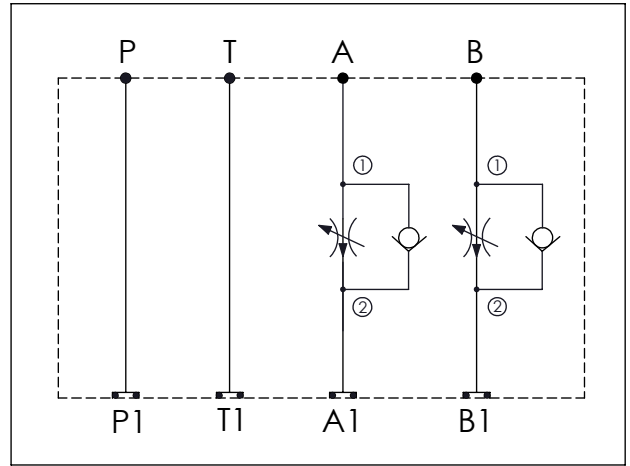


TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar
 Rated flow: 45 l/min (Pressure Compensated)

Cartridge Valve:
 Refer to FR5A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.73 kg(WITHOUT VALVES) 1.27 kg(INCLUDE VALVES)
Ductile Iron	2.13 kg(WITHOUT VALVES) 2.67 kg(INCLUDE VALVES)

* If you need the special specification. Please contact us.

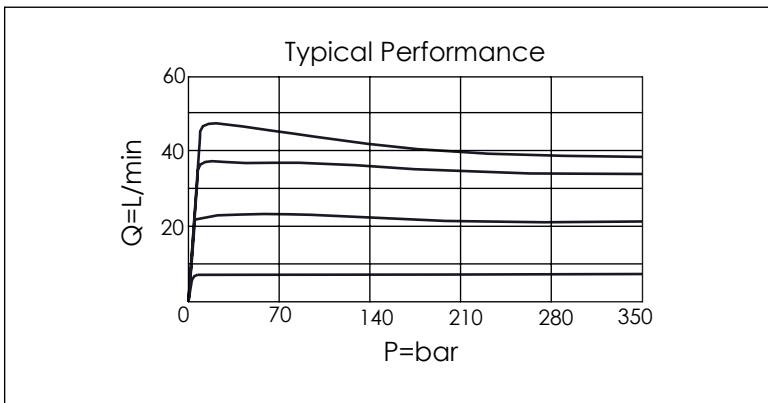

X	SELECTION FOR A PORT CONTROL
5A2	CAVITY ONLY(WITHOUT VALVE)
FR0A	FR5A20AL (45 LPM , 350bar)
Please refer to the list price of cartridge program.	

Y	SELECTION FOR B PORT CONTROL
5A2	CAVITY ONLY(WITHOUT VALVE)
FR0A	FR5A20AL (45 LPM , 350bar)
Please refer to the list price of cartridge program.	

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON