


Ordering Code: **MH05FDT-X-Y-Z 02**

Stack Height : 40.0mm

Technical drawing showing dimensions and port locations:

- Overall length: 232.0
- Port spacing (P1 to T1): 77.9
- Port spacing (T1 to A1): 76.2
- Port spacing (A1 to B1): 77.9
- Height: 63.0
- Bottom height: 40.0
- Port diameters: $\phi 7.0^{+0.10}_{-0.00}$
- O-RING CODE NO. 4KAA014AA001

UNIT:mm

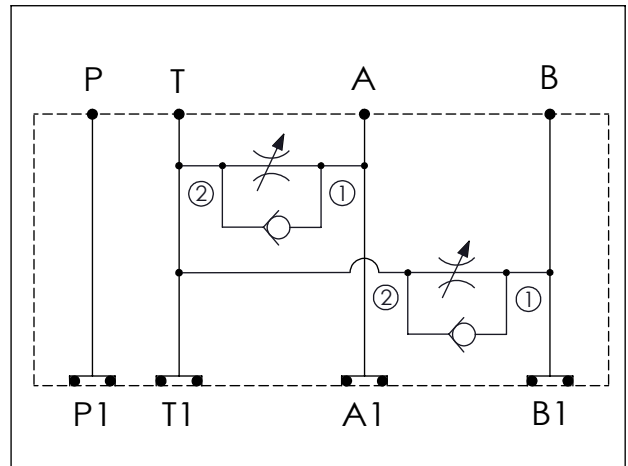

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 80 l/min


Cartridge Valve:

Refer to NC5A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.6 kg(WITHOUT VALVES)
	1.2 kg(INCLUDE VALVES)
DUCTILE IRON	1.72 kg(WITHOUT VALVES)
	2.32 kg(INCLUDE VALVES)

* If you need the special specification. Please contact us.

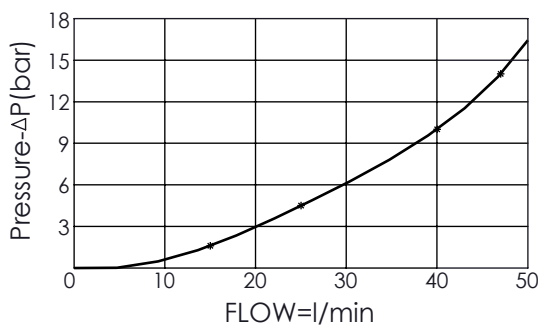

X SELECTION FOR A PORT CONTROL

5A2 CAVITY ONLY(WITHOUT VALVE)

NCBC NC5A21BCL (2.0bar)

Please refer to the list price of cartridge program.

Y SELECTION FOR B PORT CONTROL

5A2 CAVITY ONLY(WITHOUT VALVE)

NCBC NC5A21BCL (2.0bar)

Please refer to the list price of cartridge program.

Z BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON