


ISO 05 SANDWICH MANIFOLD

Ordering Code: **MH05FPT-X-Y-Z01**

Stack Height : 49.5mm

UNIT:mm

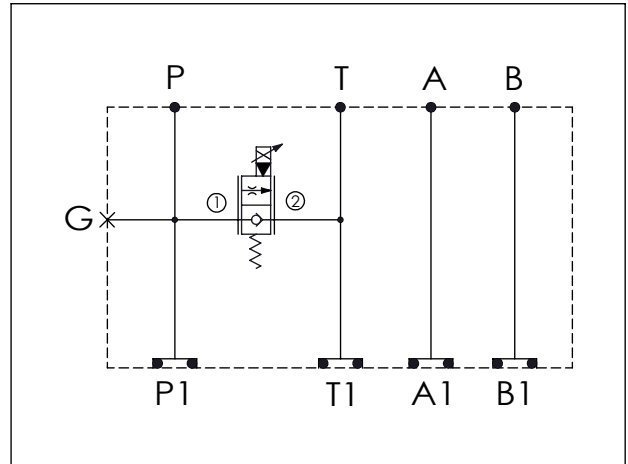

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 80 l/min

Cartridge Valve:
 Refer to PEV5A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.68 kg(WITHOUT VALVES) 1.08 kg(INCLUDE VALVES ,WITHOUT COIL)
----------	--

* If you need the special specification. Please contact us.

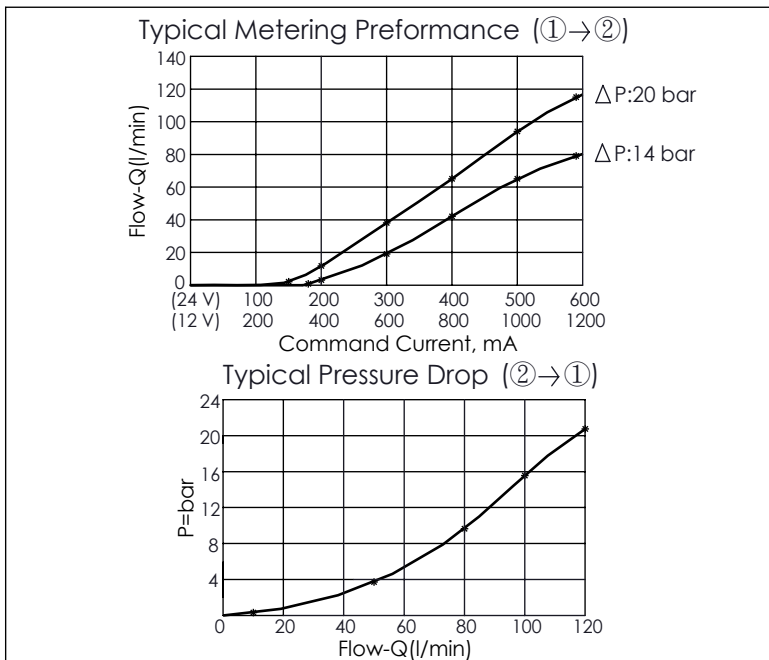

X	SELECTION FOR P PORT CONTROL (REFER TO PEV5A-X-Y-Z)
5A2	CAVITY ONLY(WITHOUT VALVE)
PEV80	PEV5A2D09N0800 , 80LPM (NORMALLY CLOSED,WITHOUT COIL)
PEV80P	PEV5A2D09P0800 , 80LPM(NORMALLY CLOSED WITH PUSH STYLE MANUAL OVERRIDE,WITHOUT COIL)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)	

Y	SELECTION FOR G PORT
G02	G 1/4"(Metric)
N02	NPT 1/4"(U.S. Units)

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM