


## ISO 05 SANDWICH MANIFOLD

Ordering Code: **MH05PPW-X-Y-Z01**

Stack Height : 49.5mm

O-RING CODE NO. 4KAA014AA001

UNIT:mm

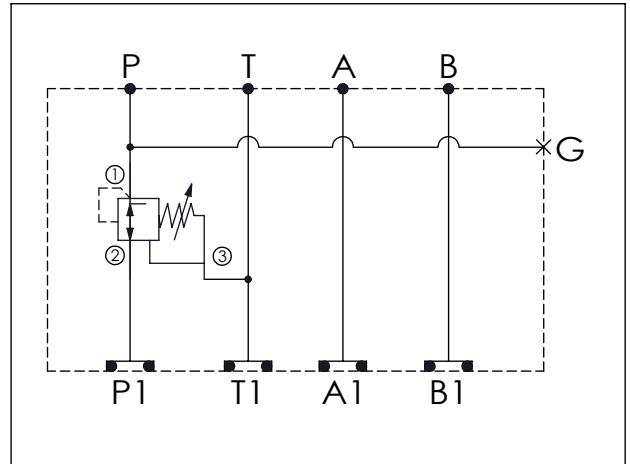

### TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron  
 Body Pressure Rating: 350 bar

Rated flow: 80 l/min

Cartridge Valve:  
 Refer to PD2A-X-Y-Z  
 \* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.65 kg(WITHOUT VALVE)
	1.0 kg(INCLUDE VALVE)
Ductile Iron	1.9 kg(WITHOUT VALVE)
	2.25 kg(INCLUDE VALVE)

\* If you need the special specification. Please contact us.

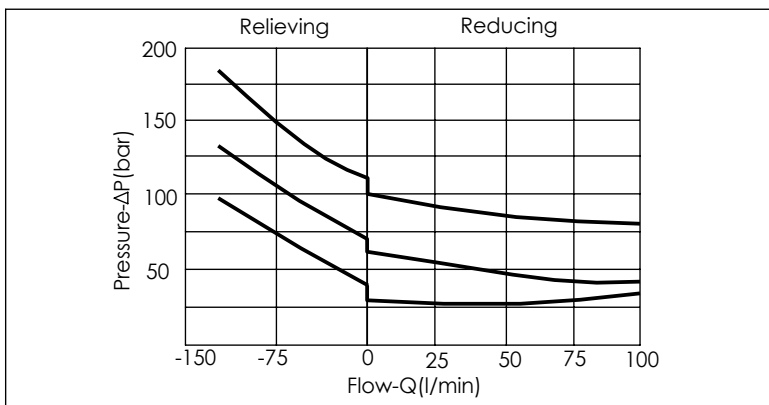

<b>X</b>	<b>SELECTION FOR P PORT CONTROL</b>
<b>2A3</b>	CAVITY ONLY (WITHOUT VALVE)
<b>PD0A</b>	PD2A30AL (85 LPM , 50-210bar)
Please refer to the list price of cartridge program.	

<b>Y</b>	<b>SELECTION FOR G PORT</b>
<b>G02</b>	G 1/4"(Metric)
<b>N02</b>	NPT 1/4"(U.S. Units)

<b>Z</b>	<b>BODY MATERIAL</b>
<b>A</b>	HIGH-STRENGTH ALUMINUM
<b>S</b>	DUCTILE IRON