

ISO 05 SANDWICH MANIFOLD


Ordering Code: **MH05RAB-X-Y-Z01**

Stack Height : 49.5mm


Dimensions: 63.0 (height), 70.6 (width to P1), 76.2 (width to B1), 151.1 (total width). Hole diameter: $\Phi 7.0^{+0.10}_{-0.00}$.

Side view shows stack height of 49.5mm and O-RING CODE NO. 4KAA014AA001.

UNIT:mm

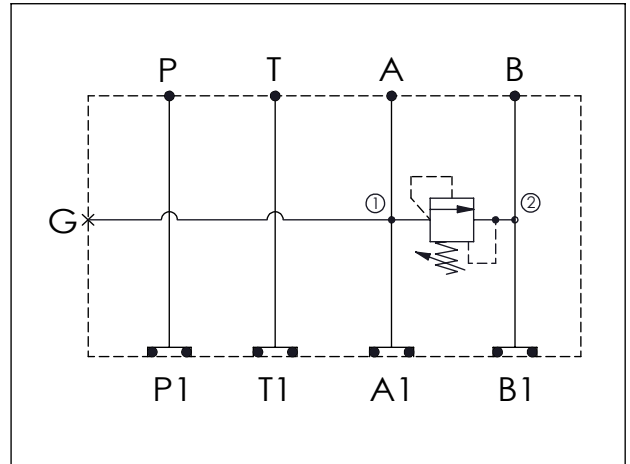

TECHNICAL DATA	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	80 l/min
Cartridge Valve:	Refer to RD3A-X-Y-Z
	* Refer to Winner Cartridge Valves Catalog.
Aluminum	0.56 kg(WITHOUT VALVE) 0.86 kg(INCLUDE VALVE)
* If you need the special specification. Please contact us.	

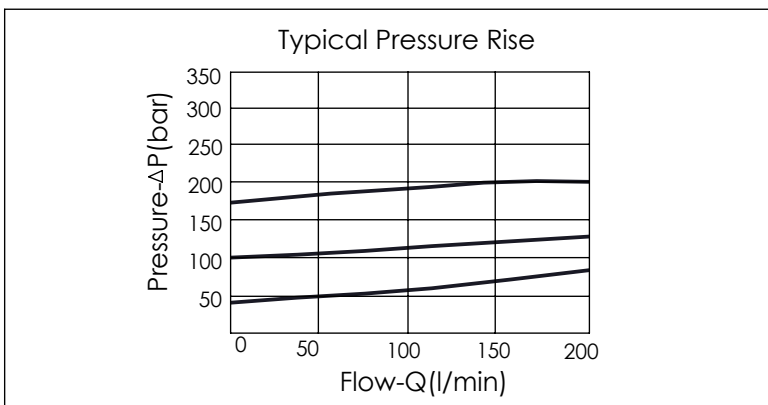

X	SELECTION FOR G PORT	
G02	G 1/4"(Metric)	
N02	NPT 1/4"(U.S. Units)	

Y	SELECTION FOR B PORT CONTROL
3A2	CAVITY ONLY(WITHOUT VALVE)
RD5A	RD3A25AL (200 LPM , 35-210bar)

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	

Please refer to the list price of cartridge program.