


Ordering Code: **MH05B-FBH-X-Y-Z 03**

Stack Height : 63.0mm

O-RING CODE NO. 4KAA014AA001

O-RING CODE NO. 4KAA012AA001

UNIT:mm

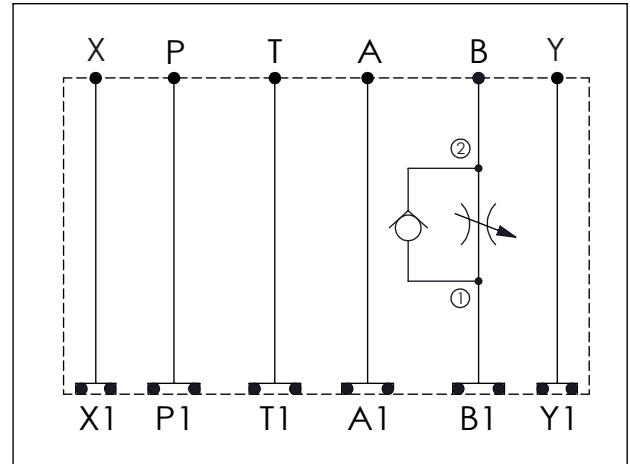


### TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron Body Pressure Rating: 350 bar  
 Rated flow: 80 l/min

Cartridge Valve:  
 Refer to NC16A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	1.09 kg(WITHOUT VALVES) 2.19 kg(INCLUDE VALVES)
Ductile Iron	3.2 kg(WITHOUT VALVES) 4.3 kg(INCLUDE VALVES)

\* If you need the special specification. Please contact us.

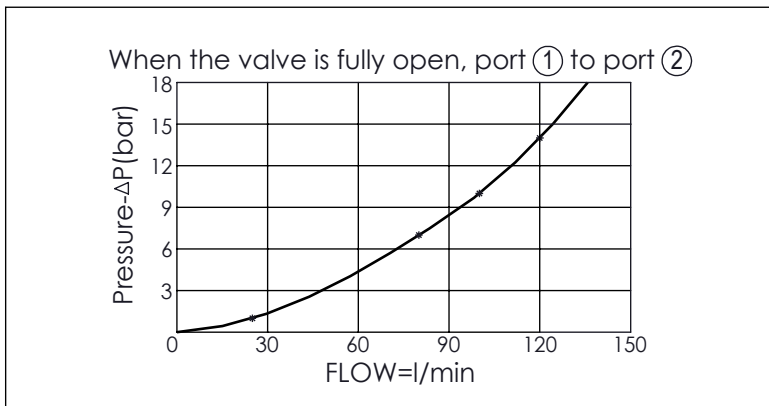

<b>X</b>	<b>SELECTION FOR A PORT CONTROL</b>
<b>N</b>	WITHOUT PORT

<b>Y</b>	<b>SELECTION FOR B PORT CONTROL</b>
<b>16A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>NCBA</b>	NC16A21BAL (0.3bar)
<b>NCBC</b>	NC16A21BCL (2.0bar)

<b>Z</b>	<b>BODY MATERIAL</b>
<b>A</b>	HIGH-STRENGTH ALUMINUM
<b>S</b>	DUCTILE IRON

Please refer to the list price of cartridge program.