


Ordering Code: **MK03ERX-X-Y-A03-Z**

MK03ERX-X-Y-S03-Z

Stack Height : 63.0mm

O-RING CODE NO. 4KAA012AA001

UNIT:mm

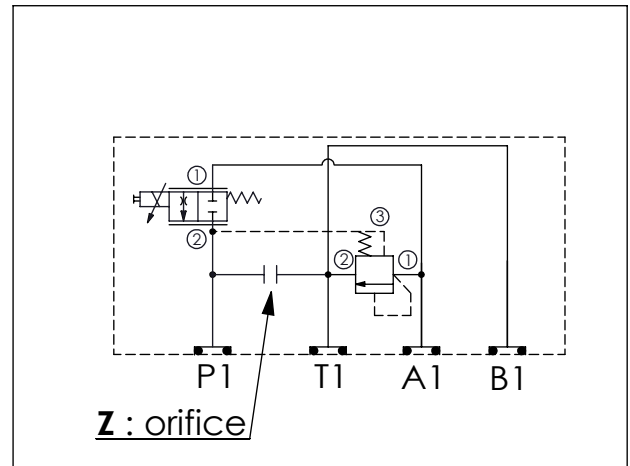

TECHNICAL DATA


Aluminum(A03) Body Pressure Rating:	210 bar
Ductile Iron(S03) Body Pressure Rating:	350 bar
Rated flow:	40 l/min

Cartridge Valve:
Refer to LR11A-X-Y-Z
PFC17E-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.63 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES ,WITHOUT COIL)
Ductile Iron	1.83 kg(WITHOUT VALVES) 2.4 kg(INCLUDE VALVES ,WITHOUT COIL)

* If you need the special specification.
Please contact us.

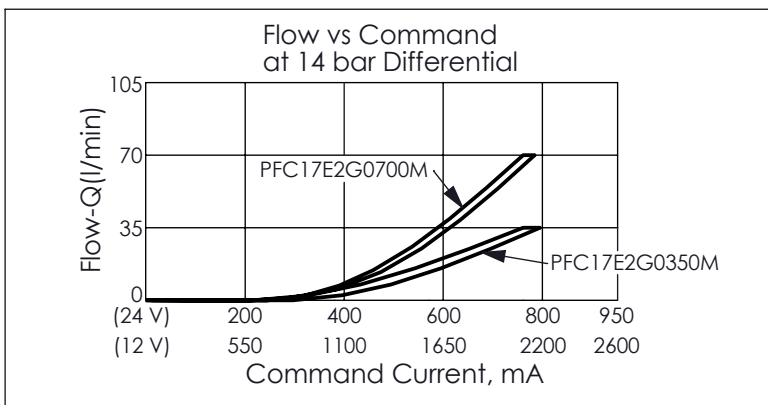

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC17E-X-Y-Z)
17E2	CAVITY ONLY(WITHOUT VALVE)
PFC35	PFC17E2G0350M(35LPM)
PFC70	PFC17E2G0700M(70LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-23C-X-Y-Z)	

X	SELECTION FOR COMPENSATOR
11A3	CAVITY ONLY(WITHOUT VALVE)
LR140	LR11A30140N(60LPM,14.0bar)
Please refer to the list price of cartridge program.	

Z	ORIFICE DIAMETER (mm)
	without orifice
05	∅ 0.5 mm (M5xP0.8 Plug)
07	∅ 0.7 mm (M5xP0.8 Plug)