

Ordering Code: **MK05ERX-X-Y-A03-Z**


Stack Height : 63.0mm

Dimensions: 108.3, 76.2, 33.9, 218.4, 63.0

Ports: B1, P1, A1


O-RING CODE NO. 4KAA014AA001

UNIT:mm

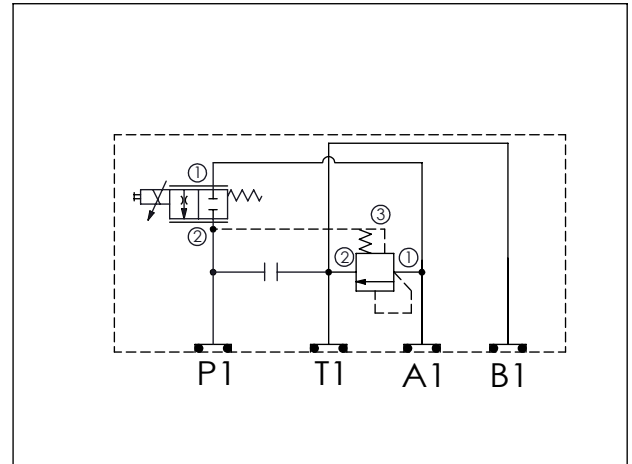

TECHNICAL DATA	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	70 l/min
Cartridge Valve:	Refer to LR2A-X-Y-Z PFC17E-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.95 kg(WITHOUT VALVES) 1.6 kg(INCLUDE VALVES ,WITHOUT COIL)

* If you need the special specification. Please contact us.

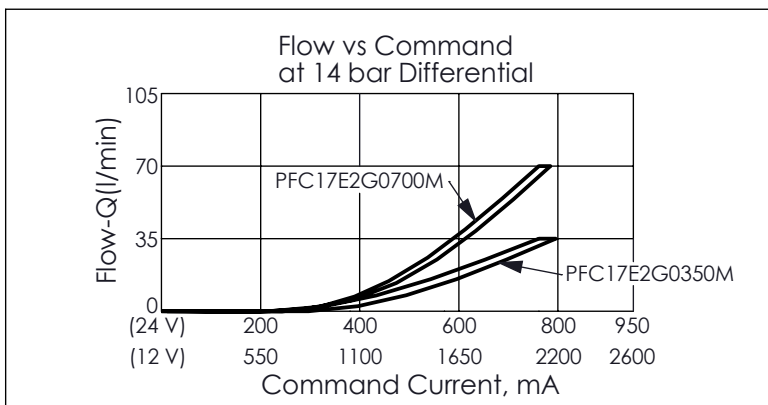

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC17E-X-Y-Z)
17E2	CAVITY ONLY(WITHOUT VALVE)
PFC35	PFC17E2G0350M(35LPM)
PFC70	PFC17E2G0700M(70LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-23C-X-Y-Z)	

X	SELECTION FOR COMPENSATOR
2A3	CAVITY ONLY(WITHOUT VALVE)
LR140	LR2A30140N(120LPM,14.0bar)
Please refer to the list price of cartridge program.	

Z	ORIFICE DIAMETER (mm)
	without orifice
05	∅ 0.5 mm (M5xP0.8 Plug)
07	∅ 0.7 mm (M5xP0.8 Plug)