



LINE MOUNT BODIES

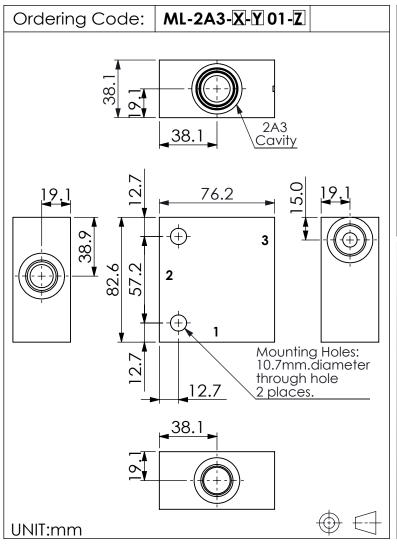



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Steel Body Pressure Rating: 350 bar

Cavity:

X

A04

G04

G06B

P03

P04

Refer to 2A3

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.53	kg(WITHOUT VALVES)
Steel	1.4	kg(WITHOUT VALVES)

PORT SIZE

PORT

3

1/2"NPT

G 1/2"

G 1/2"

3/8"PT

1/2"PT

PORTS

1,2

1/2"NPT

G 1/2"

G 3/4"

3/8"PT

1/2"PT

Y	BODY MATERIAL	
С	HIGH-STRENGTH ALUMINUM (Clear anodize)	
Α	HIGH-STRENGTH ALUMINUM	
Т	STEEL (black oxide)	

ALCTU ALUANIAUNI			'/ = ' '	1/211		
NGTH ALUMINUM odize)		7	CARTRIDGE VALVES SELECTION			
NGTH ALUMINUM		L	CARTRIDGE VALVES SELECTION			
ck oxide)			E			
		PP0A	PP2A30AL (80LPM,7-210bar)			
		PD0A	PD2A30AL (80LPM,50-2	10bar)	

Standard option of Aluminum surface treatments is Clear Anodize. If other option is required (for example: black anodize), please contact sale dept.

Please refer to the list price of cartridge program.

Rev.240604

^{*} If you need the special specification. Please contact us.