



Ordering Code: **ML-16A2-X-Y 01-Z**

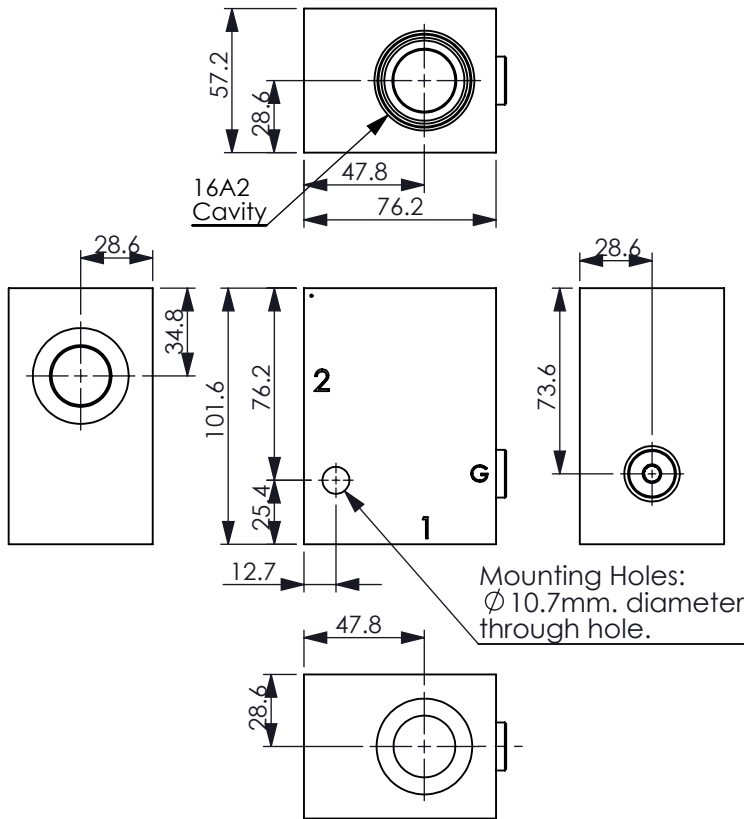

UNIT:mm

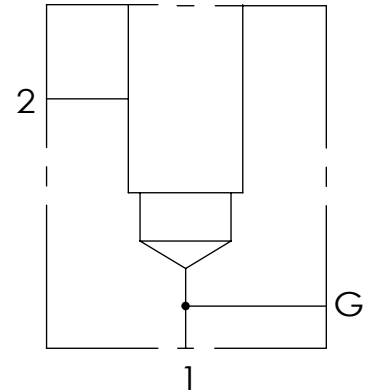

### TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Steel Body Pressure Rating: 350 bar

Cavity:

Refer to 16A2

\* Refer to Winner Cartridge Valves Catalog.

|          |                         |
|----------|-------------------------|
| Aluminum | 0.97 kg(WITHOUT VALVES) |
|----------|-------------------------|

|       |                         |
|-------|-------------------------|
| Steel | 2.58 kg(WITHOUT VALVES) |
|-------|-------------------------|

\* If you need the special specification. Please contact us.

| X           | PORT SIZE |         |  |
|-------------|-----------|---------|--|
|             | PORTS     | PORT    |  |
|             | 1,2       | G       |  |
| <b>G06G</b> | G 3/4"    | G 1/4"  |  |
| <b>G08G</b> | G 1"      | G 1/4"  |  |
| <b>G10G</b> | G 1-1/4"  | G 1/4"  |  |
| <b>S12G</b> | SAE 12    | 1/4"NPT |  |
| <b>S16G</b> | SAE 16    | 1/4"NPT |  |
| <b>S20G</b> | SAE 20    | 1/4"NPT |  |

| Y        | BODY MATERIAL          |  |
|----------|------------------------|--|
| <b>A</b> | HIGH-STRENGTH ALUMINUM |  |
| <b>T</b> | STEEL (black oxide)    |  |
|          |                        |  |
|          |                        |  |

| Z             | CARTRIDGE VALVES SELECTION   |  |
|---------------|------------------------------|--|
|               | WITHOUT VALVE                |  |
| <b>RPOA</b>   | RP16A20AL(380 LPM,7~210 bar) |  |
| <b>CV2003</b> | CV16A2003N (320LPM,0.3bar)   |  |
| <b>FROA</b>   | FR16A20AL (0.8-95LPM)        |  |
|               |                              |  |

Please refer to the list price of cartridge program.