

TECHNICAL DATA

Aluminum (A01)	210 bar
Body Pressure Rating:	
Steel (T01)	350 bar
Body Pressure Rating:	


Cavity:
Refer to 17A3

Shuttle valve:
Refer to LS11A33NN

* Refer to Winner Cartridge Valves Catalog.

Aluminum	6.3 kg (WITHOUT COUNTERBALANCE VALVE) 6.3 kg (WITH SHUTTLE VALVE)
DUCTILE IRON	18.0 kg (WITHOUT COUNTERBALANCE VALVE) 18.0 kg (WITH SHUTTLE VALVE)

* If you need the special specification.
Please contact us.

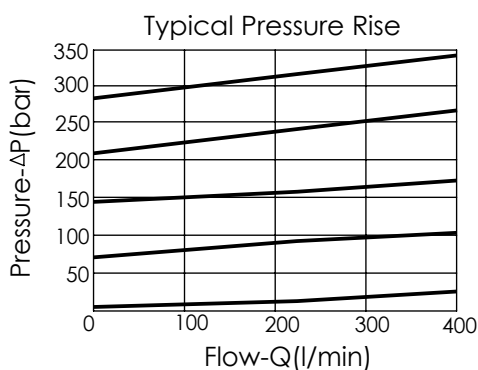

X CARTRIDGE VALVES SELECTION

17A3	CAVITY ONLY (WITHOUT VALVE)
RVOA	RV17A30AL (240LPM , 7-210bar)

Please refer to the list price of cartridge program.

Y CARTRIDGE VALVES SELECTION

17A3	CAVITY ONLY (WITHOUT VALVE)
RVOA	RV17A30AL (240LPM , 7-210bar)

Z PORT SIZE

Z	PORTS	PORT	PORTS
	1,2	V	G1,G2
G10AG	G 1-1/4"	G 1/4"	G 1/4"

Please refer to the list price of cartridge program.