




STANDARD ASSEMBLIES MANIFOLD DIRECT MOTOR MOUNTED

(Danfoss OMP/OMR Series)

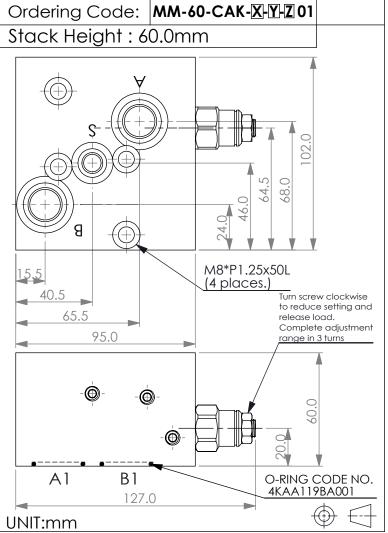

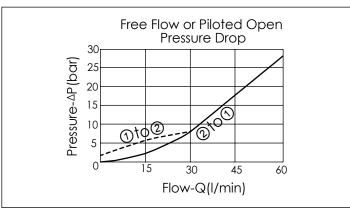

Y	PORT SIZE			
	PORTS	PORT		
	A.B	S		
G04	G 1/2"	G 1/4"		



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Rated flow: 60 1/min

Cartridge Valve:

Refer to CB11A-X-Y-Z

* Reference our Cartridge Valves Catalog.

Weight: 1.6 kg(include valve)

* If you need the special specification. Please contact us.

X	SELECTION FOR COUNTERBALANCE VALVES		
11A3	CAVITY ONLY (WITHOUT VALVE)		
СВЗН	CB11A33HL (3:1 , 280bar)		
CB4J	CB11A34JL (4.5:1 , 350bar)		
CB0J	CB11A30JL (10:1 , 350bar)		
Please refer to the list price of cartridge program.			

Z	BODY MATERIAL		
Α	HIGH-STRENGTH ALUMINUM		