



Ordering Code: **EP-20MB-X-Y-Z-05**

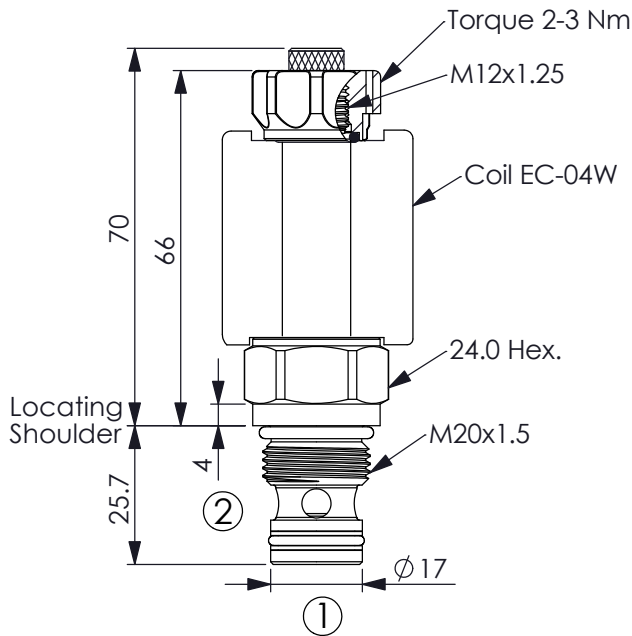

UNIT:mm

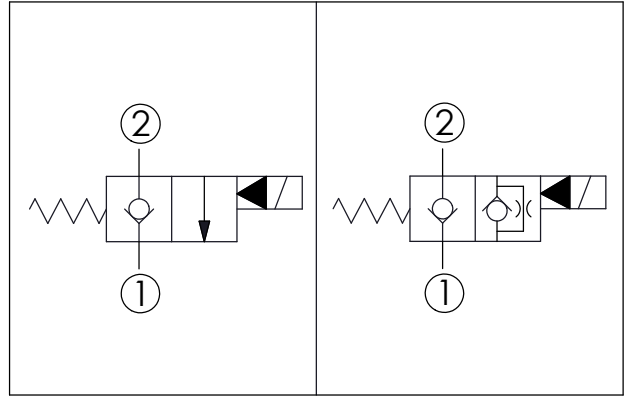

TECHNICAL DATA

Max.Operating pressure: 350 bar

Rated flow: 40 l/min

Cavity-Tooling: 20MB-2

Installation torque: 39-51 Nm

Weight: 0.13 kg

Fluids-Temperatures: -40 to 120 °C

Internal Leakage Approximately:
0.15 cc/minute


(3 drops/minute) max. at 350 bar

Hydraulic Fluid Cleanliness Level:
Please refer WINNER technical information.
(T.101.102.E HYDRAULIC FLUID (B)CLEANLISS)


Minimum Voltage Required:
90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

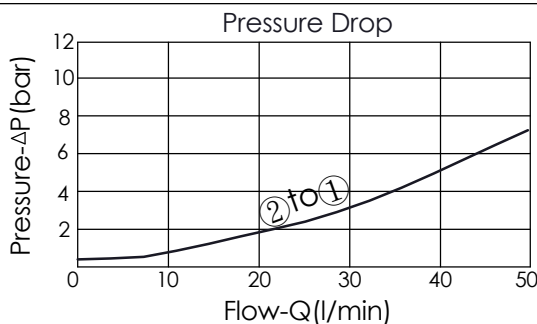

The curve is only for reference.
Please kindly contact Winner if you need detailed information.

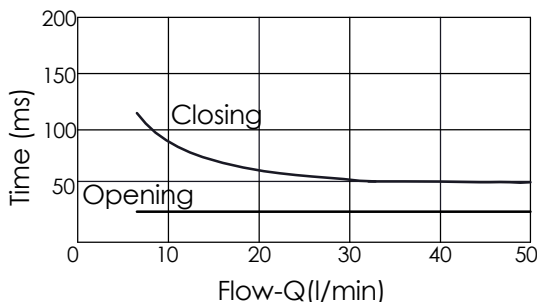

X	STRUCTURE
2A	2 Ports · 20 Watt. Coil ∅ 12.7 mm tube

Y OPERATION

01	Normally-Closed No Reverse Flow Energized
----	--

This valve is similar to check valve when de- energized.
Allow free flow from port ① to port ② and block flow from port ② to port ①.
In energized condition, this valve is allowed flow from port ② to port ① but
it's difficult to pass that flow from port ① to port ②.
If you need bi-directional flow, please refer Y=05.

Z OPTIONS

N	Non-adjustable	
M	Screw-out Knob Style	