


| TECHNICAL DATA | |
|---|----------------|
| Max.Operating pressure: | 350 bar |
| Rated flow: | 240 l/min |
| Cavity-Tooling: | 21E-2 |
| Installation torque: | 80 - 100 Nm |
| Weight: | 0.459 (Z=N) kg |
| Internal Leakage Approximately: 0.15 cc/minute (3 drops/minute) max. at 350 bar | |
| Hydraulic Fluid Viscosity · Cleanliness · Temperature Level: Please refer WINNER technical information. (T.101.101.E HYDRAULIC FLUID (A) VISCOSITY) (T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS) (T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE) | |
| Minimum Voltage Required: 90 % of nominal | |
| Coils must be ordered separately | |
| Mounting Position: unrestricted | |

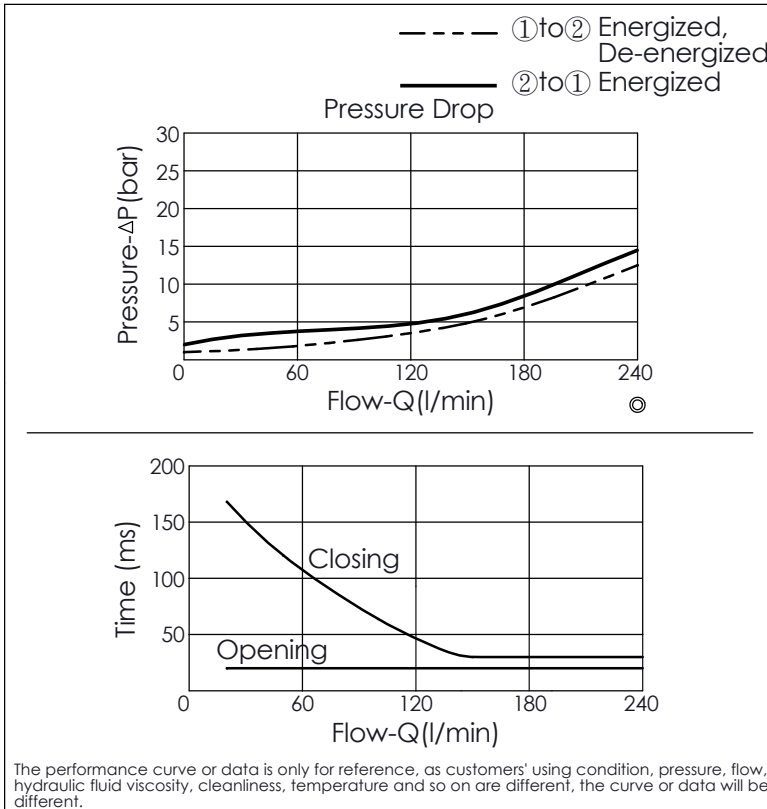

| Y | OPERATION |
|----|---|
| 05 | Normally-Closed Reverse Flow Energized |

| X | STRUCTURE |
|----|---|
| 2A | 2 Ports · 20 Watt. Coil Ø 12.7 mm tube |

| Z | OPTIONS |
|---|---|
| N | Non-adjustable |
| P | Push Style Manual Override |
| T | Push and Twist Style Manual Override (For emergency or test use only. Please keep at the normal operational position after turning counterclockwise.) (A larger force is required for downward push during high-pressure operations, please contact Winner's sales department.) |