


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	40 l/min
Cavity-Tooling:	08W-2
Installation torque:	39 - 51 Nm
Weight:	0.126 (Z=N) kg

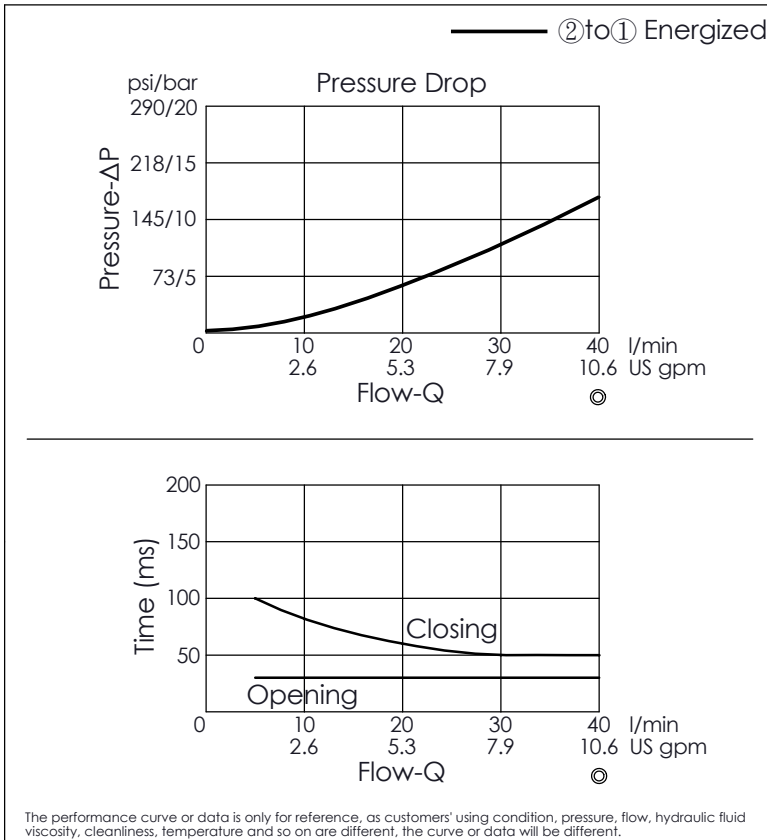

Internal Leakage Approximately:  
0.15 cc/minute  
(3 drops/minute) max. at 210 bar

Hydraulic Fluid Viscosity · Cleanliness · Temperature Level:  
Please refer WINNER technical information.  
( T.101.101.E HYDRAULIC FLUID (A) VISCOSITY )  
( T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS )  
( T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE )

Filter Standard:  $\phi$ 0.3mm (50 mesh)  
(If you need more finer mesh filter, please feel free to contact us.)

Minimum Voltage Required:  
90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

X	STRUCTURE	
2A	2 Ports · 20 Watt. Coil $\phi$ 12.7 mm tube	

Y	OPERATION	
07	Normally-Closed With Filter No Reverse Flow Energized	

This valve is similar to check valve when de-energized. Allow free flow from port ① to port ② and block flow from port ② to port ①. In energized condition, this valve is allowed flow from port ② to port ① but it's difficult to pass that flow from port ① to port ②. If you need bi-directional flow, please refer Y=05. (please contact Winner's sales department)

Z	OPTIONS	
N	Non-adjustable	
M	Screw-out Knob Style	