
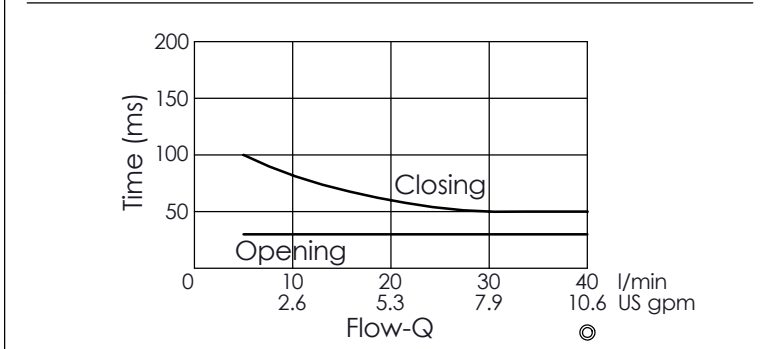


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	40 l/min
Cavity-Tooling:	19E-2
Installation torque:	39 - 51 Nm
Weight:	0.131 (Z=N) kg

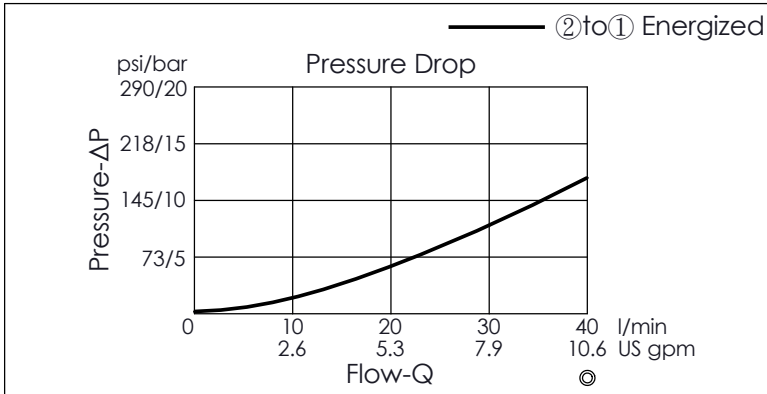

The performance curve or data is only for reference, as customers' using condition, pressure, flow, hydraulic fluid viscosity, cleanliness, temperature and so on are different, the curve or data will be different.

Internal Leakage Approximately:
0.15 cc/minute
(3 drops/minute) max. at 210 bar

Hydraulic Fluid Viscosity · Cleanliness · Temperature Level:
Please refer WINNER technical information.
(T.101.101.E HYDRAULIC FLUID (A) VISCOSITY)
(T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS)
(T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE)

Filter Standard: ϕ 0.3mm (50 mesh)
(If you need more finer mesh filter, please feel free to contact us.)

Minimum Voltage Required:
90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

X	STRUCTURE
2A	2 Ports · 20 Watt. Coil ϕ 12.7 mm tube

Y	OPERATION
07	Normally-Closed With Filter No Reverse Flow Energized

This valve is similar to check valve when de-energized. Allow free flow from port ① to port ② and block flow from port ② to port ①. In energized condition, this valve is allowed flow from port ② to port ① but it's difficult to pass that flow from port ① to port ②. If you need bi-directional flow, please refer Y=05. (please contact Winner's sales department)

Z	OPTIONS
N	Non-adjustable
M	Screw-out Knob Style