



Ordering Code: **EP-33MC-X-Y-Z-05**

UNIT:mm

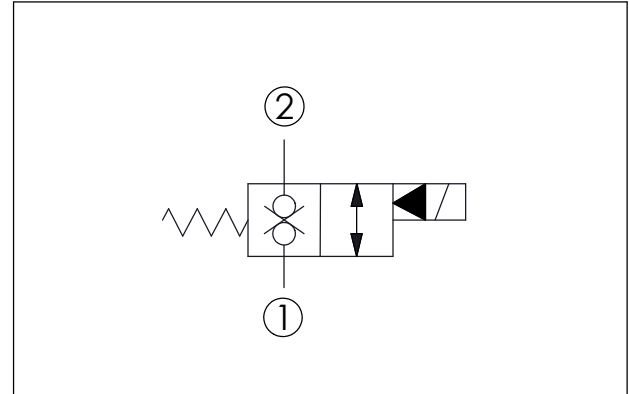

| TECHNICAL DATA | |
|--|---------------|
| Max.Operating pressure: | 350 bar |
| Rated flow: | 150 l/min |
| Cavity-Tooling: | 33MC-2 |
| Installation torque: | 80-100 Nm |
| Weight: | 0.32 (Z=N) kg |
| Fluids-Temperatures: | -40 to 120 °C |
| Internal Leakage Approximately: 0.15 cc/minute (3 drops/minute) max. at 350 bar | |
| Hydraulic Fluid Cleanliness Level: Please refer WINNER technical information. (T.101.102.E HYDRAULIC FLUID (B)CLEANLINESS) | |
| Minimum Voltage Required: 90 % of nominal | |
| Coils must be ordered separately | |
| Mounting Position: unrestricted | |

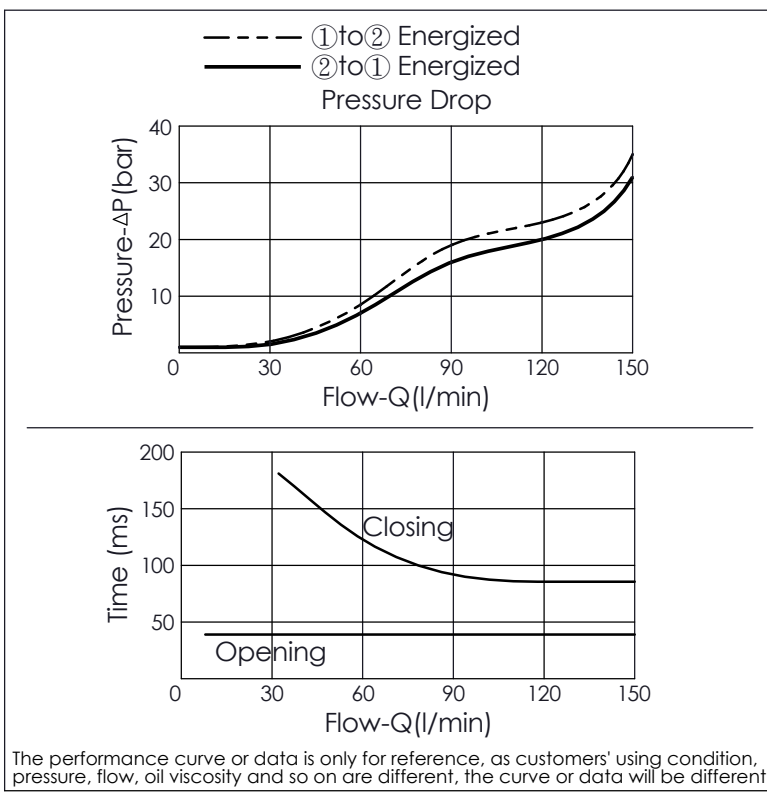

| X | STRUCTURE | |
|----|-------------------------|--|
| 2A | 2 Ports · 20 Watt. Coil | |
| | ∅ 12.7 mm tube | |

| Y | OPERATION | |
|----|-----------------------------|--|
| 31 | Normally-Closed Double Lock | |

| Z | OPTIONS | |
|---|----------------------|--|
| N | Non-adjustable | |
| M | Screw-out Knob Style | |