



TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	40 l/min
Cavity-Tooling:	13A-2
Installation torque:	39-51 Nm
Weight:	0.14 (Z=N) kg
Fluids-Temperatures:	-40 to 120 °C
Internal Leakage Approximately:	0.15 cc/minute (3 drops/minute) max. at 350 bar
Hydraulic Fluid Cleanliness Level:	Please refer WINNER technical information. (T.101.102.E HYDRAULIC FLUID (B)CLEANLINESS)
Minimum Voltage Required:	90 % of nominal
Coils must be ordered separately	
Mounting Position:	unrestricted

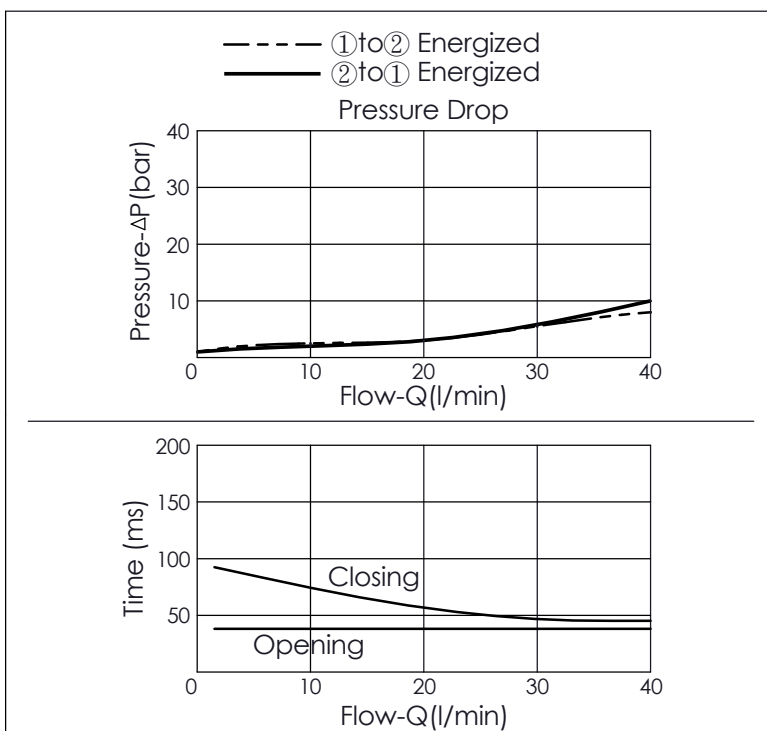

The performance curve or data is only for reference, as customers' using condition, pressure, flow, oil viscosity and so on are different, the curve or data will be different.

Y	OPERATION
31	Normally-Closed Double Lock, Fast acting

X	STRUCTURE
2C	2 Ports · 26 Watt. Coil Ø 16 mm tube

Z	OPTIONS
N	Non-adjustable 
M	Screw-out Knob Style 