
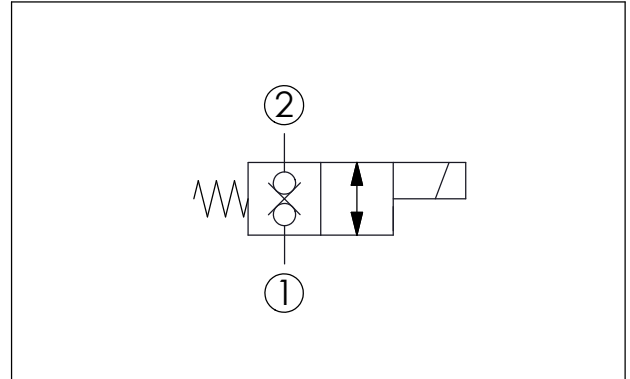


Ordering Code: **EP-08W-X-Y-Z-04-H**


Note:
The direction of coil has to be installed properly, otherwise the efficiency of magnetic force will be insufficient.

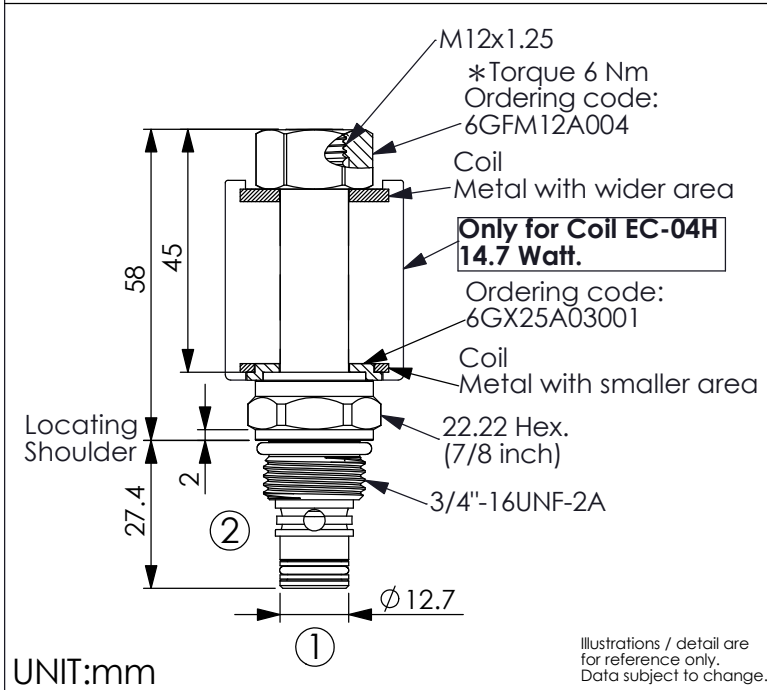

TECHNICAL DATA	
Max.Operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	10 l/min (Refer To Performance Chart)
Cavity-Tooling:	08W-2
Installation torque:	39 - 51 Nm
Weight:	0.122 (Z=N) kg

Performance Chart

--- ①to② Energized
— ②to① Energized

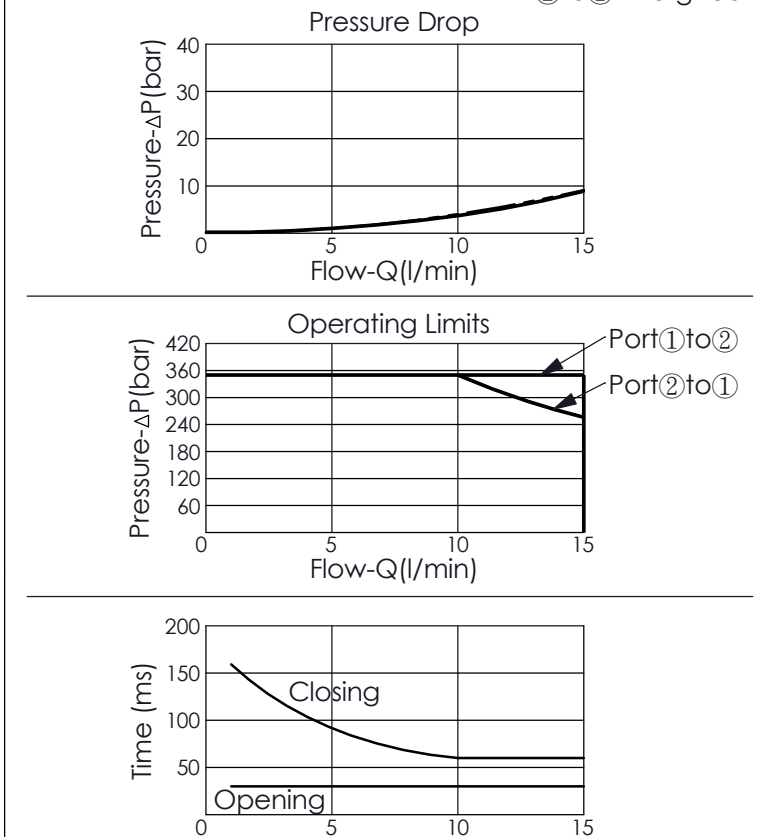

The performance curve or data is only for reference, as customers' using condition, pressure, flow, hydraulic fluid viscosity, cleanliness, temperature and so on are different, the curve or data will be different.

Internal Leakage Approximately:
0.15 cc/minute
(3 drops/minute) max. at 350 bar

Hydraulic Fluid Viscosity · Cleanliness · Temperature Level:
Please refer WINNER technical information.
(T.101.101.E HYDRAULIC FLUID (A) VISCOSITY)
(T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS)
(T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE)

Minimum Voltage Required:
90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

X	STRUCTURE
2A	2 Ports, Ø 12.7 mm, 45mm length tube

Z	OPTIONS
N	Non-adjustable

Y	OPERATION
51	Direct-Acting Normally -Closed Double-Lock