





TECHNICAL DATA	
Max. Operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	20 l/min (Refer To Performance Chart)
Cavity-Tooling:	20M-2
Installation torque:	39 - 51 Nm
Weight Approx.:	0.20 (Z=N) kg

Internal Leakage Approximately: 0.15 cc/minute (3 drops/minute) max. at 350 bar
Hydraulic Fluid Viscosity · Cleanliness · Temperature Level: Please refer WINNER technical information. (T.101.101.E HYDRAULIC FLUID (A) VISCOSITY) (T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS) (T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE)
Minimum Voltage Required: 90 % of nominal
Coils must be ordered separately
Mounting Position: unrestricted

X	STRUCTURE
2C	2 Ports · 26 Watt. Coil Ø 16 mm tube

Z	OPTIONS
N	Non-adjustable 
P	Push Style Manual Override 
T	Push and Twist Style Manual Override (For emergency or test use only. Please keep at the normal operational position after turning counterclockwise.) (A larger force is required for downward push during high-pressure operations, please contact Winner's sales department.) 

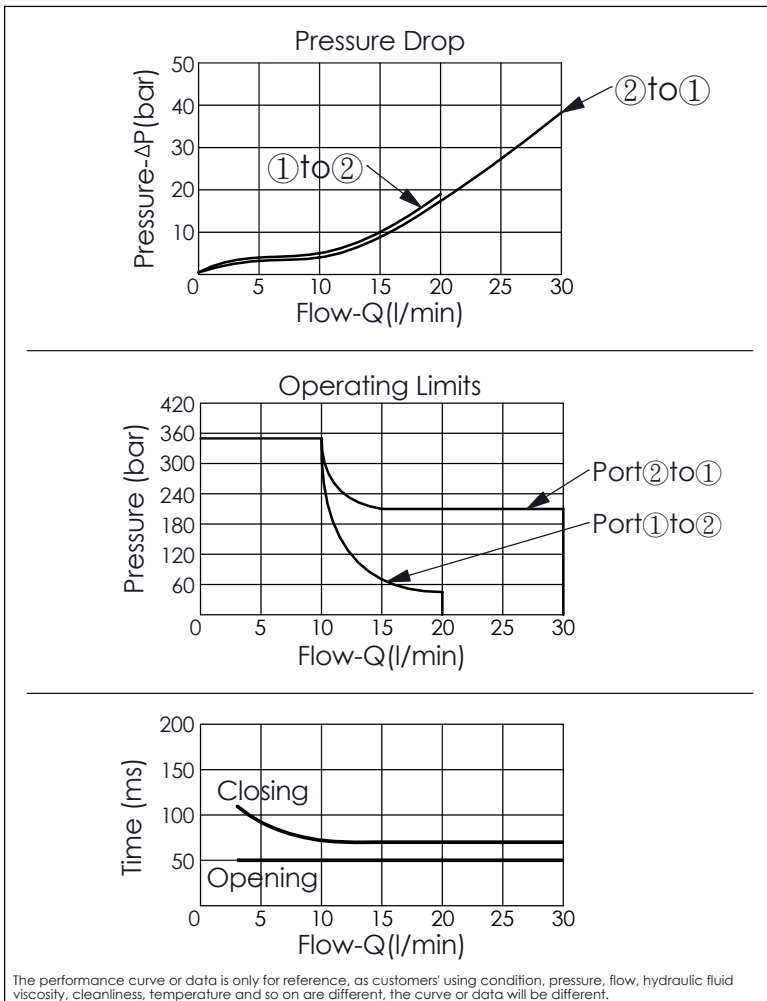

Y	OPERATION
52	Direct-Acting Normally-Open Double-Lock, Fast acting