


TECHNICAL DATA		
Rated pressure:	350 bar	(Refer To Performance Chart)
Rated flow:	10 l/min	(Refer To Performance Chart)
Cavity-Tooling:	08W-4	
Installation torque:	39 - 51 Nm	
Weight:	0.12 (Z=N) kg	
Response time depending on pressure and flow	ON	30 - 60 ms
	OFF	20 - 40 ms

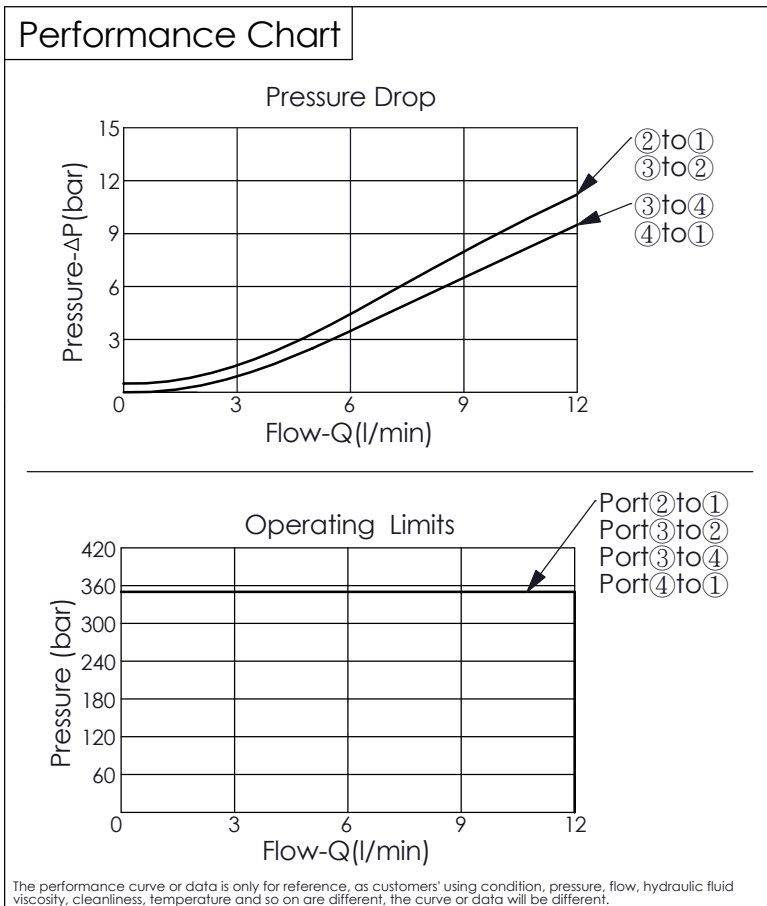

Hydraulic Fluid Viscosity · Cleanliness · Temperature Level:
Please refer WINNER technical information.
(T.101.101.E HYDRAULIC FLUID (A) VISCOSITY)
(T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS)
(T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE)

Minimum Voltage Required:
90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

X	STRUCTURE	
4A	4 Ports · 20 Watt. Coil	∅ 12.7 mm tube
Y	OPERATION	
17A	Spool 4-Way, 2-Position	
Z	OPTIONS	
N	Non-adjustable	
P	Push Style Manual Override	