
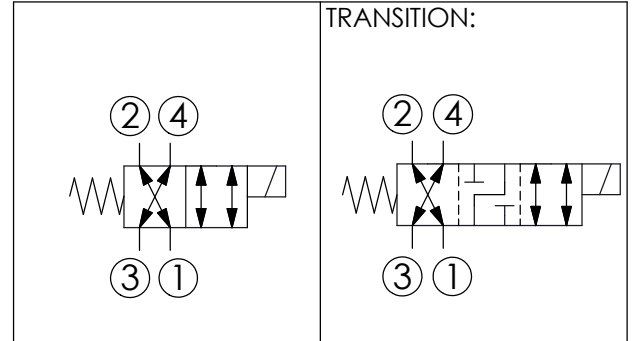


SOLENOID OPERATED VALVE (Direct-Acting) (Spool 4-Way 2-Position)

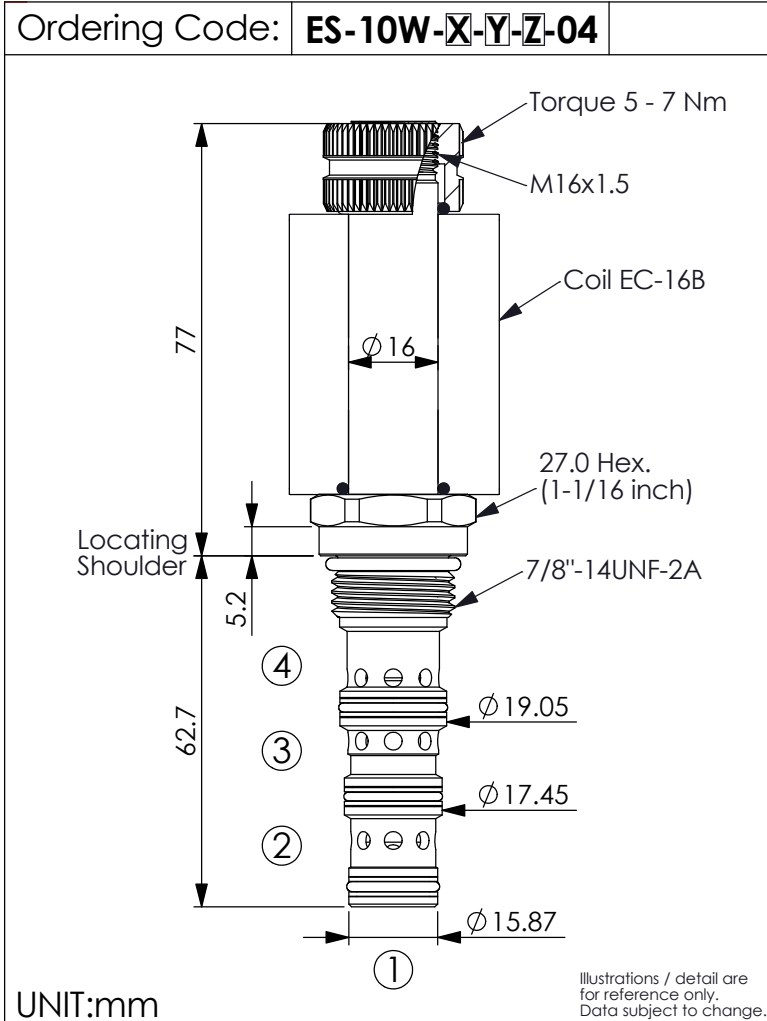

TECHNICAL DATA	
Max.Operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	25 l/min (Refer To Performance Chart)
Cavity-Tooling:	10W - 4
Installation torque:	25 - 35 Nm
Weight:	0.213 (Z=N) kg

Response time depending on pressure and flow	ON	30 - 60 ms
	OFF	20 - 40 ms



Hydraulic Fluid Viscosity · Cleanliness · Temperature Level:
Please refer WINNER technical information.
(T.101.101.E HYDRAULIC FLUID (A) VISCOSITY)
(T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS)
(T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE)

Minimum Voltage Required:
90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted


Performance Chart

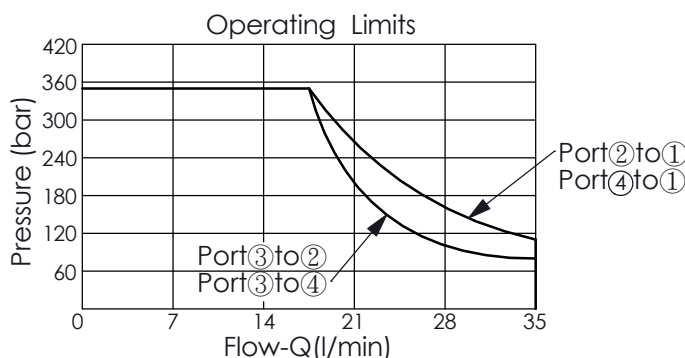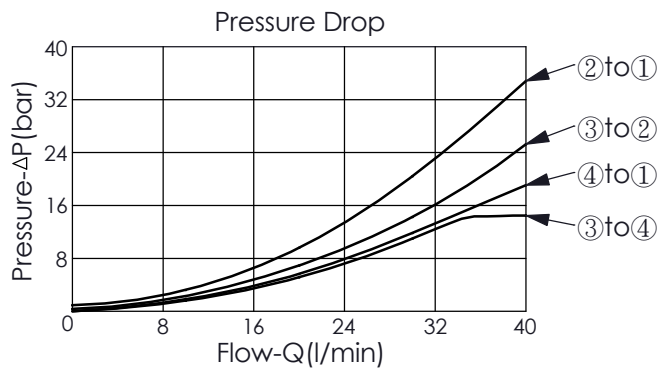

The performance curve or data is only for reference, as customers' using condition, pressure, flow, hydraulic fluid viscosity, cleanliness, temperature and so on are different, the curve or data will be different.

X	STRUCTURE
4C	4 Ports · 26 Watt. Coil ϕ 16 mm tube

Y	OPERATION
17A	Spool 4-Way, 2-Position

Z	OPTIONS
N	Non-adjustable 
P	Push Style Manual Override 