

CARTRIDGE CONTROL OPTIONS

Leakproof Hex. Socket Screw with Steel Cap

LB

Leakproof Hex. Socket Screw with Steel Cap with Lockwire Holes (LA Option with Lockwire Holes)


Last Code of Valve **LA Option**


Note:

If the 6GFU12A015 is ordered separately, please consider whether the lockwire hole on the valve or the fixed method and position of lockwire.

Last Code of Valve

LB Option





Important:

UNIT:mm

This structure can't limit the maximum stroke. Please adjust the valve carefully to avoid damaging the valve.

The appearance and

the dimension are only for reference

UNIT:mm

Important:

The appearance and the dimension are only for reference.

Leakproof Hex. Socket Screw with Steel Cap with Lockwired (LB Option with Lockwire and Stop Ring)

Note:

If the 6GFU12A015 is ordered separately, please consider whether the lockwire hole on the valve or the fixed method and position of lockwire.

Last Code of Valve

LC Option

Stainless Steel Cover with Sealed Adjustment Control Kit

This structure can't limit the maximum stroke.

Please adjust the valve carefully to avoid

Note: Suitable for adjustment screw 3/8"-24UNF, height less than 23.1mm.

2. Make sure the seals fit into the groove and end side.


7ZAD001


Order Code

3. 15.87 Hex. (5/8 inch) •

damaging the valve.

4. The last end of the ordering code is LD. and the option is 5-piece components.

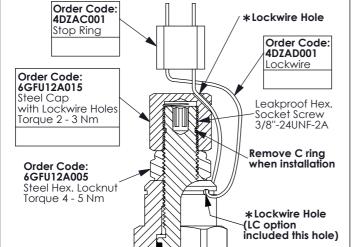



Product Name	Ordering Code	Q'TY
Stainless Steel C ring	4DBA090004	1
VITON O-Ring	4KAB999EB007	2
Stainless Steel Tamper Resistant Cover External Hex. Sealed	6GFU18A002	1
Stainless Steel External Hex. Sealed Locknut	6GX17C13001	1

The appearance and the dimension are only for reference.

Important:

This structure can't limit the maximum stroke. Please adjust the valve carefully to avoid damaging the valve.

UNIT:mm

The appearance and the dimension are only for reference.

UNIT:mm Rev.240227 J.990.107.E