


TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	300 l/min
Cavity-Tooling:	20W-2 (20WB-2)
Installation torque:	110 - 130 Nm
Weight:	0.651 (Z=N) kg
Internal Leakage Approximately: 0.15 cc/minute (3 drops/minute) max. at 350 bar	
Hydraulic Fluid Viscosity · Cleanliness · Temperature Level: Please refer WINNER technical information. (T.101.101.E HYDRAULIC FLUID (A)VISCOSITY) (T.101.102.E HYDRAULIC FLUID (B)CLEANLINESS) (T.101.103.E HYDRAULIC FLUID (C)TEMPERATURE)	
Minimum Voltage Required: 90 % of nominal	
Coils must be ordered separately	
Mounting Position: unrestricted	

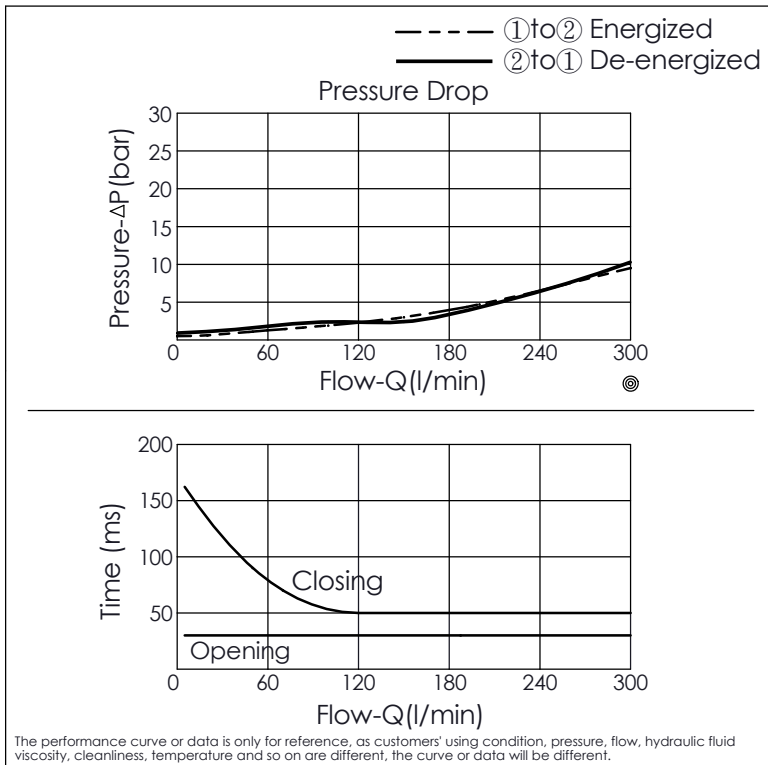

Y	OPERATION	
02	Normally-Open No Reverse Flow De-energized	

X	STRUCTURE	
2A	2 Ports · 20 Watt. Coil φ 12.7 mm tube	

Z	OPTIONS	
N	Non-adjustable	
P	Push Style Manual Override	
T	Push and Twist Style Manual Override (For emergency or test use only. Please keep at the normal operational position after turning counterclockwise.) (A larger force is required for downward push during high-pressure operations, please contact Winner's sales department.)	